

**SEISMIC HAZARD ZONE REPORT FOR THE  
LANCASTER WEST 7.5-MINUTE QUADRANGLE,  
LOS ANGELES COUNTY, CALIFORNIA**

**2005**



**DEPARTMENT OF CONSERVATION**  
*California Geological Survey*

**THE RESOURCES AGENCY**  
MICHAEL CHRISMAN  
SECRETARY FOR RESOURCES

**STATE OF CALIFORNIA**  
ARNOLD SCHWARZENEGGER  
GOVERNOR

**DEPARTMENT OF CONSERVATION**  
DEBBIE SAREERAM  
INTERIM DIRECTOR



CALIFORNIA GEOLOGICAL SURVEY  
MICHAEL S. REICHLER, ACTING STATE GEOLOGIST

Copyright © 2004 by the California Department of Conservation. All rights reserved. No part of this publication may be reproduced without written consent of the Department of Conservation.

"The Department of Conservation makes no warranties as to the suitability of this product for any particular purpose."

**SEISMIC HAZARD ZONE REPORT 095**

**SEISMIC HAZARD ZONE REPORT FOR THE  
LANCASTER WEST 7.5-MINUTE QUADRANGLE,  
LOS ANGELES COUNTY, CALIFORNIA**

**CALIFORNIA GEOLOGICAL SURVEY'S PUBLICATION SALES OFFICES:**

Southern California Regional Office  
888 South Figueroa Street, Suite 475  
Los Angeles, CA 90017  
(213) 239-0878

Publications and Information Office  
801 K Street, MS 14-31  
Sacramento, CA 95814-3531  
(916) 445-5716

Bay Area Regional Office  
345 Middlefield Road, MS 520  
Menlo Park, CA 94025  
(650) 688-6327

## List of Revisions – Lancaster West SHZR 095

[illegible]



# CONTENTS

EXECUTIVE SUMMARY .....	vii
INTRODUCTION .....	1
SECTION 1 LIQUEFACTION EVALUATION REPORT Liquefaction Zones in the Lancaster West 7.5-Minute Quadrangle, Los Angeles County, California .....	3
PURPOSE .....	3
BACKGROUND .....	4
METHODS SUMMARY .....	5
SCOPE AND LIMITATIONS .....	5
PART I .....	6
PHYSIOGRAPHY .....	6
GEOLOGY .....	6
ENGINEERING GEOLOGY .....	8
GROUND WATER .....	10
PART II .....	12
LIQUEFACTION POTENTIAL .....	12
LIQUEFACTION SUSCEPTIBILITY .....	12
LIQUEFACTION OPPORTUNITY .....	13
LIQUEFACTION ZONES .....	14
ACKNOWLEDGMENTS .....	16
REFERENCES .....	17

SECTION 2 EARTHQUAKE-INDUCED LANDSLIDE EVALUATION REPORT	
Earthquake-Induced Landslide Zones in the Lancaster West 7.5-Minute Quadrangle, Los Angeles County, California .....	21
PURPOSE .....	21
Background .....	22
METHODS SUMMARY .....	22
Scope and Limitations .....	23
PART I .....	24
PHYSIOGRAPHY .....	24
GEOLOGY .....	25
ENGINEERING GEOLOGY .....	26
PART II .....	27
EARTHQUAKE-INDUCED LANDSLIDE hazard potential .....	27
EARTHQUAKE-INDUCED LANDSLIDE Hazard ZONE .....	30
ACKNOWLEDGMENTS .....	31
REFERENCES .....	31
AIR PHOTOS .....	34
APPENDIX A Source of Rock Strength Data .....	34
SECTION 3 GROUND SHAKING EVALUATION REPORT Potential Ground Shaking in the Lancaster West 7.5-Minute Quadrangle, Los Angeles County, California .....	35
PURPOSE .....	35
EARTHQUAKE HAZARD MODEL .....	36
APPLICATIONS FOR LIQUEFACTION AND LANDSLIDE HAZARD ASSESSMENT .....	40
USE AND LIMITATIONS .....	43
REFERENCES .....	44

## ILLUSTRATIONS

Figure 2.1. Yield Acceleration vs. Newmark Displacement for the Lucerne Record.....	29
Figure 3.1. Lancaster West 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10 percent exceedance in 50 years peak ground acceleration (g)—Firm rock conditions. ....	37
Figure 3.2. Lancaster West 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10 percent exceedance in 50 years peak ground acceleration (g)—Soft rock conditions. ....	38
Figure 3.3. Lancaster West 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10 percent exceedance in 50 years peak ground acceleration (g)—Alluvium conditions. ....	39
Figure 3.4. Lancaster West 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10 percent exceedance in 50 years peak ground acceleration—Predominant earthquake.....	41
Figure 3.5. Lancaster West 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10 percent exceedance in 50 years magnitude-weighted pseudo-peak acceleration for alluvium - Liquefaction opportunity .....	42
Table 1.1. Map Units Used in the Lancaster West 7.5-Minute Quadrangle (after Ponti and others, 1981) .....	8
Table 1.2. Quaternary Map Units Used in the Lancaster West 7.5-Minute Quadrangle and Their Geotechnical Characteristics and Liquefaction Susceptibility .....	10
Table 2.1. Summary of the Shear Strength Statistics for the Lancaster West Quadrangle.....	27
Table 2.2. Summary of Shear Strength Groups for the Lancaster West Quadrangle. ....	27
Table 2.3. Hazard Potential Matrix for Earthquake-Induced Landslides in the Lancaster West Quadrangle.....	30
Plate 1.1. Quaternary geologic map of the Lancaster West 7.5-Minute Quadrangle, California .....	46
Plate 1.2. Depth to ground water and location of boreholes used in this study, Lancaster West 7.5-Minute Quadrangle, California.....	47





## EXECUTIVE SUMMARY

This report and the accompanying Preliminary Seismic Hazard Zones Map for the Lancaster West 7.5-Minute Quadrangle, Los Angeles County, California, are revisions of the original preliminary report and map that were released April 17, 2003. This report and map reflect required changes following the adoption of revised seismic hazard zone mapping criteria by the State Mining and Geology Board in April 2004. Accordingly, the 90-day period provided for public review is repeated, beginning on the release date noted on the revised Preliminary Seismic Hazard Zones map. The report summarizes the methods and sources of information used to prepare the accompanying seismic hazard zones map. The map displays the boundaries of zones of required investigation for liquefaction and earthquake-induced landslides over an area of approximately 62 square miles at a scale of 1 inch = 2,000 feet.

The quadrangle lies in the Antelope Valley in northern Los Angeles County. The center of the area is about 44 miles north of the Los Angeles Civic Center. The northern half is nearly level, at 2,340 to 2,350 feet elevation. The northern part was the site of a regional pluvial lake where fine-grained sediments were deposited in late Pleistocene time. In the southwestern corner, the land rises to an elevation of 3,300 feet on Portal Ridge. Southwest of Lancaster, Quartz Hill is about 200 feet above the surrounding area along Avenue M at 40<sup>th</sup> Street West. Most of the land in the map area is within the City of Lancaster, including the community of Quartz Hill. Land east of the Antelope Valley Freeway south of Avenue M is within the City of Palmdale, as is a small area south of Avenue N in the southwestern corner. The remainder of the quadrangle is unincorporated Los Angeles County land. Land use consists of residential and commercial developments, airport facilities, agriculture, and government and prison facilities.

The map is prepared by employing geographic information system (GIS) technology, which allows the manipulation of three-dimensional data. Information considered includes topography, surface and subsurface geology, borehole data, historical ground-water levels, existing landslide features, slope gradient, rock-strength measurements, geologic structure, and probabilistic earthquake shaking estimates. The shaking inputs are based upon probabilistic seismic hazard maps that depict peak ground acceleration, mode magnitude, and mode distance with a 10 percent probability of exceedance in 50 years.

Within the Lancaster West Quadrangle zones of required investigation for liquefaction hazard include: a swath of low ground that lies along the juncture of two major alluvial fans sloping to the north and east to the west of Lancaster; a narrow strip that coincides with the Amargosa Creek channel; and water-reclamation ponds at the county park situated at the east end of Fox Air Field. No landslides were recognized in the Lancaster West Quadrangle. Most of the quadrangle is land of low relief. Only the hilly areas are subject to landsliding and less than one percent of the quadrangle lies within an earthquake-induced landslide hazard zone.

### How to view or obtain the map

Seismic Hazard Zone Maps, Seismic Hazard Zone Reports and additional information on seismic hazard zone mapping in California are available on the California Geological Survey's Internet page: <http://www.consrv.ca.gov/CGS/index.htm>

Paper copies of Official Seismic Hazard Zone Maps, released by CGS, which depict zones of required investigation for liquefaction and/or earthquake-induced landslides, are available for purchase from:

BPS Reprographic Services  
945 Bryant Street  
San Francisco, California 94105  
(415) 512-6550

Seismic Hazard Zone Reports (SHZR) summarize the development of the hazard zone map for each area and contain background documentation for use by site investigators and local government reviewers. These reports are available for reference at CGS offices in Sacramento, San Francisco, and Los Angeles. **NOTE: The reports are not available through BPS Reprographic Services.**

# INTRODUCTION

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) [now called California Geological Survey (CGS)] to delineate seismic hazard zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use the seismic hazard zone maps in their land-use planning and permitting processes. They must withhold development permits for a site within a zone until the geologic and soil conditions of the project site are investigated and appropriate mitigation measures, if any, are incorporated into development plans. The Act also requires sellers (and their agents) of real property within a mapped hazard zone to disclose at the time of sale that the property lies within such a zone. Evaluation and mitigation of seismic hazards are to be conducted under guidelines adopted by the California State Mining and Geology Board (SMGB) (DOC, 1997). The text of this report is on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>

The Act directs SMGB to appoint and consult with the Seismic Hazards Mapping Act Advisory Committee (SHMAAC) in developing criteria for the preparation of the seismic hazard zone maps. SHMAAC consists of geologists, seismologists, civil and structural engineers, representatives of city and county governments, the state insurance commissioner and the insurance industry. In 1991 SMGB adopted initial criteria for delineating seismic hazard zones to promote uniform and effective statewide implementation of the Act. These initial criteria, which were published in 1992 as CGS Special Publication 118, were revised in 1996 and 2004. The Act also directed CGS to develop a set of probabilistic seismic maps for California and to research methods that might be appropriate for mapping earthquake-induced landslide hazards.

In 1996, working groups established by SHMAAC reviewed the prototype maps and the techniques used to create them. The reviews resulted in recommendations that 1) the process for zoning liquefaction hazards remain unchanged and 2) earthquake-induced landslide zones be delineated using a modified Newmark analysis.

In April 2004, significant revisions of liquefaction zone mapping criteria relating to application of historically high ground-water level data in desert regions of the state were adopted by the SMGB. These modifications are reflected in the revised CGS Special Publication 118 (DOC, 2004), which is available on the Internet at: [http://gmw.consrv.ca.gov/shmp/webdocs/sp118\\_revised.pdf](http://gmw.consrv.ca.gov/shmp/webdocs/sp118_revised.pdf)

This report and the accompanying Preliminary Seismic Hazard Zones map incorporate the newly adopted criteria and replace the original preliminary report and map that were released in April 17, 2003. The report summarizes the development of the hazard zone map. The process of zoning for liquefaction uses a combination of Quaternary geologic

mapping, ground-water information, and subsurface geotechnical data. The process for zoning earthquake-induced landslides incorporates earthquake loading, existing landslide features, slope gradient, rock strength, and geologic structure. Probabilistic seismic hazard maps, which are the underpinning for delineating seismic hazard zones, have been prepared for peak ground acceleration, mode magnitude, and mode distance with a 10 percent probability of exceedance in 50 years (Petersen and others, 1996) in accordance with the mapping criteria.

This report summarizes seismic hazard zone mapping for potentially liquefiable soils and earthquake-induced landslides in the Lancaster West 7.5-Minute Quadrangle.

# **SECTION 1**

## **LIQUEFACTION EVALUATION REPORT**

### **Liquefaction Zones in the Lancaster West 7.5-Minute Quadrangle, Los Angeles County, California**

**By  
Ralph C. Loyd**

**California Department of Conservation  
California Geological Survey**

*Note: In April 2004, significant revisions of liquefaction zone mapping criteria relating to application of historically high ground-water levels in desert regions of the state were adopted by the State Mining and Geology Board (SMGB). These changes are reflected in the revised CGS Special Publication 118 (DOC, 2004), which is available on the Internet at [http://gmw.consrv.ca.gov/shmp/webdocs/sp118\\_revised.pdf](http://gmw.consrv.ca.gov/shmp/webdocs/sp118_revised.pdf)*

*This report and the accompanying Preliminary Seismic Hazard Zones Map for the Lancaster West Quadrangle, which are revisions of the original preliminary report and map released in April 17, 2003, incorporate the newly adopted zone mapping criteria.*

### **PURPOSE**

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) [now called California Geological Survey (CGS)] to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use seismic hazard zone maps developed by CGS in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within seismic hazard zones.

Evaluation and mitigation of seismic hazards are to be conducted under guidelines adopted by the California State Mining and Geology Board (SMGB) (DOC, 1997). The text of this report is on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>

Following the release of DMG Special Publication 117 (DOC, 1997), agencies in the Los Angeles metropolitan region sought more definitive guidance in the review of geotechnical investigations addressing liquefaction hazards. The agencies made their request through the Geotechnical Engineering Group of the Los Angeles Section of the American Society of Civil Engineers (ASCE). This group convened an implementation committee under the auspices of the Southern California Earthquake Center (SCEC). The committee, which consisted of practicing geotechnical engineers and engineering geologists, released an overview of the practice of liquefaction analysis, evaluation, and mitigation techniques (SCEC, 1999). This text is also on the Internet at: <http://www.scec.org/>

This section of the evaluation report summarizes seismic hazard zone mapping for potentially liquefiable soils in the Lancaster West 7.5-Minute Quadrangle. The section and the accompanying Preliminary Seismic Hazard Zones map are revisions of an earlier preliminary report and map released April 17, 2003. The changes, which affect liquefaction zonation in some high desert regions, were prompted by SMGB adoption of revised criteria in April 2004 (DOC, 2004).

Section 2 (addressing earthquake-induced landslides) and Section 3 (addressing potential ground shaking), complete the report, which is one of a series that summarizes production of similar seismic hazard zone maps within the state (Smith, 1996). Additional information on seismic hazards zone mapping in California is on CGS's Internet web page: <http://www.consrv.ca.gov/CGS/index.htm>

## **BACKGROUND**

Liquefaction-induced ground failure historically has been a major cause of earthquake damage in southern California. During the 1971 San Fernando and 1994 Northridge earthquakes significant damage to roads, utility pipelines, buildings, and other structures in the Los Angeles area was caused by liquefaction-induced ground displacement.

Localities most susceptible to liquefaction-induced damage are underlain by loose, water-saturated, granular sediment within 40 feet of the ground surface. These geological and ground-water conditions exist in parts of southern California, most notably in some densely populated valley regions and alluviated floodplains. In addition, the potential for strong earthquake ground shaking is high because of the many nearby active faults. The combination of these factors constitutes a significant seismic hazard in the southern California region in general, including areas in the Lancaster West Quadrangle.

## METHODS SUMMARY

Characterization of liquefaction hazard presented in this report requires preparation of maps that delineate areas underlain by potentially liquefiable sediment. The following were collected or generated for this evaluation:

- Existing geologic maps were used to provide an accurate representation of the spatial distribution of Quaternary deposits in the study area. Geologic units that generally are susceptible to liquefaction include late Quaternary alluvial and fluvial sedimentary deposits and artificial fill
- Shallow ground-water maps were constructed
- Geotechnical data were quantitatively analyzed to evaluate liquefaction potential of deposits
- Information on potential ground shaking intensity based on CGS probabilistic shaking maps

The data collected for this evaluation were processed into a series of geographic information system (GIS) layers using commercially available software. The liquefaction zone map was derived from a synthesis of these data and according to criteria adopted by the SMGB (DOC, 2004).

## SCOPE AND LIMITATIONS

Evaluation for potentially liquefiable soils generally is confined to areas covered by Quaternary (less than about 1.6 million years) sedimentary deposits. Most of Lancaster West Quadrangle lies within the alluviated floor of the Antelope Valley. CGS's liquefaction hazard evaluations are based on information on earthquake ground shaking, surface and subsurface lithology, geotechnical soil properties, and ground-water depth, which is gathered from various sources. Although selection of data used in this evaluation was rigorous, the quality of the data used varies. The State of California and the Department of Conservation make no representations or warranties regarding the accuracy of the data obtained from outside sources.

Liquefaction zone maps are intended to prompt more detailed, site-specific geotechnical investigations, as required by the Act. As such, liquefaction zone maps identify areas where the potential for liquefaction is relatively high. They do not predict the amount or direction of liquefaction-related ground displacements, or the amount of damage to facilities that may result from liquefaction. Factors that control liquefaction-induced ground failure are the extent, depth, density, and thickness of liquefiable materials, depth to ground water, rate of drainage, slope gradient, proximity to free faces, and intensity and duration of ground shaking. These factors must be evaluated on a site-specific basis to assess the potential for ground failure at any given project site.



Information developed in the study is presented in two parts: physiographic, geologic, and hydrologic conditions in PART I, and liquefaction and zoning evaluations in PART II.

## **PART I**

### **PHYSIOGRAPHY**

#### **Study Area Location and Physiography**

The Lancaster West 7.5-Minute Quadrangle covers approximately 62 square miles in the Antelope Valley in northern Los Angeles County. The center of the area is about 44 miles north of the Los Angeles Civic Center. The terrain in the northern half of the quadrangle is nearly level, at 2,340 to 2,350 feet, where fine-grained sediments were deposited at the margin of a regional pluvial lake or playa in late Pleistocene time. In the southwestern corner the land rises to an elevation of 3,300 feet on Portal Ridge. Southwest of Lancaster Quartz Hill rises about 200 feet above the surrounding area along Avenue M at 40<sup>th</sup> Street West. Amargosa Creek, which flows northward in the eastern part of the quadrangle, becomes indistinct near the center of the area where the lake deposits occur. Most of the land in the quadrangle is within the City of Lancaster, including the community of Quartz Hill. Land east of the Antelope Valley Freeway and south of Avenue M is within the City of Palmdale, as is a small area south of Avenue N in the southwestern corner. General William J. Fox Airfield is in the northwestern corner of the quadrangle. The remainder of the quadrangle is unincorporated Los Angeles County land. Land use consists of residential and commercial developments, airport facilities, agriculture, and government and prison facilities. Access to the area is via State Highway 14 (Antelope Valley Freeway) and Sierra Highway and a grid of county roads consisting of numbered north-south streets and lettered east-west avenues.

### **GEOLOGY**

#### **Bedrock and Surficial Geology**

Geologic units that are generally susceptible to liquefaction include late Quaternary alluvial and fluvial sedimentary deposits and artificial fill. For this evaluation, the Quaternary geologic map of western Antelope Valley (Ponti and others, 1981) was digitized by the Southern California Areal Mapping Project. The geology for the Lancaster West Quadrangle was extracted from this regional map, with minor modifications added by CGS to form a 1:24,000-scale map. Plate 1.1 shows the generalized Quaternary geology of the Lancaster West Quadrangle that was used in combination with other data to evaluate liquefaction potential and develop the Seismic Hazard Zone Map.

Nearly the entire quadrangle is covered by alluvial deposits of Quaternary age. These Pleistocene through Holocene surficial deposits are summarized in Table 1.1 and discussed below. The remaining area consists of metamorphic rocks exposed on the Quartz Hill and granitic and metamorphic rocks exposed in the southwestern corner of the quadrangle. The bedrock units are discussed in the earthquake-induced landslide portion (Section 2) of this report.

Ponti and others (1981) mapped the Quaternary units based on relative age (Q1-7; 1 being oldest) and grain size (f=fine, m=medium, and c=coarse). Deposits exposed in the Lancaster West Quadrangle are discussed below.

The oldest Quaternary unit on the map (Q3) consists of weakly consolidated, uplifted and moderately to severely dissected Pleistocene alluvial fan deposits. These deposits occur only in the southwestern corner of the quadrangle along the base of the foothills. Soils on these materials are moderately to well developed with well-formed horizons and clay accumulations.

In the lower western third of the quadrangle are exposures of late Pleistocene alluvial fan materials (Q4). Ponti and others (1981) describe this unit as unconsolidated, uplifted, and slightly dissected alluvial fan deposits. These coarse materials have moderately developed soils, distinct horizons and clay accumulations.

Covering several square miles in the center area of the quadrangle is a medium-grained sedimentary unit (Quca) rich in secondary calcium carbonate. Ponti and others (1981) assume the parent materials to be equivalent to Q4, Q5, and Q6 sediments (late Pleistocene to Holocene). The unit, which locally contains up to 50 percent calcium carbonate concretions and platey cemented layers, is considered by Ponti (1980) to have been affected by fluctuating ground water during late Pleistocene and early Holocene time. In the Lancaster West Quadrangle, the presence of calcium carbonate is usually limited to a zone extending between 5 and 15 feet in depth.

Much of the northern half of the quadrangle is covered by sediments mapped by Ponti and others (1981) as Quaternary playa deposits (Qpl). Regionally, these sediments are described as compact lacustrine silt and clay with minor loose well-sorted sand and fine gravel deposited in the shallow-water margins of the last pluvial lake that filled the lowland parts of Antelope Valley up to about 12,000 years ago. However, such deposits in the Lancaster West Quadrangle appear to contain significant amounts of loose sand and silt (see Engineering Geology section).

Map Unit	Environment of Deposition	Age
Qsc	modern wash	latest Holocene
Qsd	sand dunes	latest Holocene
Q7	alluvial fan	latest Holocene
Q6	alluvial fan, wash, colluvial aprons	late Pleistocene and Holocene
Quca	alluvial fan, with secondary carbonate	late Pleistocene and Holocene
Qpl	playa deposits	late Pleistocene and Holocene
Q4	alluvial fan	late Pleistocene
Q3	alluvial fan	Pleistocene

**Table 1.1. Map units used in the Lancaster West 7.5-Minute Quadrangle (after Ponti and others, 1981).**

Holocene alluvial fan and wash sediments (Q6) are unconsolidated mainly medium-grained sediments representing deposition during latest Pleistocene and Holocene time. Soils on these alluvial fan and colluvial materials are weakly developed.

Latest Holocene coarse- to medium-grained clastic sediments (Q7) were deposited on both sides of Amargosa Creek during overbank sheet flooding. These deposits are unconsolidated with little if any soil development. The deposits within the modern washes (Qsc) and sand dunes (Qsd) are also unconsolidated with no soil development.

### **Structural Geology**

The Lancaster West Quadrangle lies within the Antelope Valley, a wedge-shaped part of the Mojave Desert bounded on the northwest by the Garlock Fault and the Tehachapi Mountains, and on the south by the San Andreas Fault and the Transverse Ranges. The trace of the closest active fault within the San Andreas Rift Zone is within Leona Valley approximately one mile south of the southwestern corner of the quadrangle. This and other active faults within the zone, including strands that ruptured during the great 1857 Fort Tejon earthquake, have been included in the Official Earthquake Fault Zone maps prepared by CDMG [now CGS] (1979a; 1979b) and considered to be a major potential seismic source (Petersen and others, 1996).

## **ENGINEERING GEOLOGY**

As stated above, soils that are generally susceptible to liquefaction are mainly late Quaternary alluvial and fluvial sedimentary deposits and artificial fill. Deposits that contain saturated, loose sandy and silty soils are most susceptible to liquefaction.

Lithologic descriptions and soil test results reported in geotechnical borehole logs provide valuable information regarding subsurface geology, ground-water levels, and the engineering characteristics of sedimentary deposits.

Of particular value in liquefaction evaluations are logs that report the results of downhole standard penetration tests. Standard Penetration Tests (SPTs) provide a uniform measure of the penetration resistance of geologic deposits and are commonly used as an index of soil density. This in-field test consists of counting the number of blows required to drive a split-spoon sampler (1.375-inch inside diameter) one foot into the soil at the bottom of a borehole at chosen intervals while drilling. The driving force is provided by dropping a 140-pound hammer weight 30 inches. The SPT method is formally defined and specified by the American Society for Testing and Materials (2004) in test method D1586.

Recorded blow counts for non-SPT geotechnical sampling where the sampler diameter, hammer weight or drop distance differ from those specified for an SPT (ASTM D1586), are converted to SPT-equivalent blow counts. The actual and converted SPT blow counts are normalized to a common-reference, effective-overburden pressure of one atmosphere (approximately one ton per square foot) and a hammer efficiency of 60 percent using a method described by Seed and Idriss (1982) and Seed and others (1985). This normalized blow count is referred to as  $(N_1)_{60}$ .

The Seed-Idriss Simplified Procedure for liquefaction evaluation was developed primarily for clean sand and silty sand. As described above, results depend greatly on accurate evaluation of in-situ soil density as measured by the number of soil penetration blow counts using an SPT sampler. However, many of the Holocene alluvial deposits in the study area contain a significant amount of gravel. In the past, gravelly soils were considered not to be susceptible to liquefaction because the high permeability of these soils presumably would allow the dissipation of pore pressures before liquefaction could occur. However, liquefaction in gravelly soils has been observed during earthquakes, and recent laboratory studies have shown that gravelly soils are susceptible to liquefaction (Ishihara, 1985; Harder and Seed, 1986; Budiman and Mohammadi, 1995; Evans and Zhou, 1995; and Sy and others, 1995). SPT-derived density measurements in gravelly soils are unreliable and generally too high. They are likely to lead to overestimation of the density of the soil and, therefore, result in an underestimation of the liquefaction susceptibility. To identify potentially liquefiable units where the  $N$  values appear to have been affected by gravel content, correlations were made with boreholes in the same unit where the  $N$  values do not appear to have been affected by gravel content.

During the initial stages of this investigation, CGS obtained logs of geotechnical boreholes that had been drilled in various localities within Antelope Valley. Staff collected the logs from the files of the cities of Lancaster and Palmdale, California Department of Transportation, Los Angeles County Public Works Department, and Earth Systems, Inc. Thirty seven of the logs are from boreholes drilled within the Lancaster West Quadrangle. The borehole sites were digitally located and associated log data entered into the CGS geotechnical GIS database to enable computer-assisted analysis and evaluation.

Examination of borehole logs indicate that throughout the Lancaster West Quadrangle sedimentary deposits at depths of less than 40 feet are composed of loose to moderately dense sandy and silty sediments interbedded with clay, even within the area mapped by Ponti and others (1981) as lacustrine playa deposits (see Geology section). The lithologic descriptions provided in geotechnical borehole logs were augmented by examination of lithologic descriptions included in the logs of scores of water wells drilled in the study area.

Geologic Map Unit	Material Type	Consistency	Age	Liquefaction Susceptibility*
stream channel, wash (Qsc)	medium to coarse sand and gravel	very loose	latest Holocene	high
sand dune (Qsd)	sand	very loose	Holocene & late Pleistocene	high
overbank, sheet flood (Q7)	sand, gravel, & silt	Loose	Holocene & late Pleistocene	high
alluvial fan, overbank, sheet flood (Q6)	sand, gravel, & silt	loose to dense	Holocene & late Pleistocene	high to moderate
alluvial fan w/ secondary carbonate (Quca)	sand and silt w/ up to 10' thick zone of calcium carbonate cement	loose to very dense	Holocene & late Pleistocene	high to low
playa deposits (Qpl)	sand, silt, clay	loose to dense	Holocene & late Pleistocene	high to low
alluvial fan (Q4)	gravel, sand, silt, clay	Dense	Pleistocene	low
alluvial fan (Q3)	gravel, sand, silt, clay	Dense	Pleistocene	low

\*when saturated

**Table 1.2. Quaternary Map Units used in the Lancaster West 7.5-Minute Quadrangle and Their Geotechnical Characteristics and Liquefaction Susceptibility**

## GROUND WATER

Saturation reduces the effective normal stress of near-surface sediment, thereby increasing the likelihood of earthquake-induced liquefaction (Youd, 1973). CGS compiles and interprets ground-water data to identify areas characterized by, or anticipated to have in the future, near-surface saturated soils. For purposes of seismic hazard zonation, "near-surface" means at a depth less than 40 feet.

Natural hydrologic processes and human activities can cause ground-water levels to fluctuate over time. Therefore, it is impossible to predict depths to saturated soils during future earthquakes. One method of addressing time-variable depths to saturated soils is to establish an anticipated high ground-water level based on historical ground-water data. In areas where ground water is either currently near-surface or could return to near-surface within a land-use planning interval of 50 years, CGS constructs regional contour maps that depict these levels. In some areas with low precipitation, such as Antelope Valley, records may indicate that near-surface ground water existed during historical time, but large withdrawal and low recharge rates preclude a return to those conditions within 50 years. For these areas, the historically highest ground-water level is not used to establish the anticipated depth to saturated soil used for hazard evaluation. For these and all other areas, CGS delineates present or anticipated near-surface saturated soils caused by locally perched water and seepage from surface-water bodies.

Future initiation of large-scale, artificial recharge programs could result in significant rises in ground-water levels over 50 years. When alerted of such plans, CGS will evaluate their impacts relative to liquefaction potential and revise official seismic hazard zone maps, if necessary. Plate 1.2 depicts areas characterized by present or anticipated shallow ground water within the Lancaster West Quadrangle.

Staff used the following publications and internet sources to evaluate ground-water conditions and historical ground-water use in the Lancaster West and surrounding quadrangles: Johnson (1911); Thompson (1929); California Department of Water Resources (1965); Bloyd (1967); Durbin (1978); Duell (1987); Leighton and Associates (1990); Templin and others (1995); Galloway and others (1998); Carlson and others (1998); Carlson and Phillips (1998); Sneed and Galloway (2000); Los Angeles County Department of Public Works (2003); and California Department of Water Resources (2003). A detailed report of the ground-water hydrology of Antelope Valley is available on the U.S. Geological Survey web site (U.S. Geological Survey, 2003). In addition, satellite imagery provided by ASTER (2001) was used to identify and delineate major drainages and surface water bodies.

Boreholes drilled by the California Department of Transportation (CalTrans) along State Route 14 between Avenues D and G in the late 1960's early 1970's report ground water at depths less than 40 feet. However, regional ground-water levels presented in Carlson and others (1998) indicate that water levels appear to have dropped dramatically in recent time. Consequently, the CalTrans logged ground-water levels were not used in the evaluation.

## **PART II**

### **LIQUEFACTION POTENTIAL**

Liquefaction may occur in water-saturated sediment during moderate to great earthquakes. Liquefied sediment loses strength and may fail, causing damage to buildings, bridges, and other structures. Many methods for mapping liquefaction hazard have been proposed. Youd (1991) highlights the principal developments and notes some of the widely used criteria. Youd and Perkins (1978) demonstrate the use of geologic criteria as a qualitative characterization of liquefaction susceptibility and introduce the mapping technique of combining a liquefaction susceptibility map and a liquefaction opportunity map to produce a liquefaction potential map. Liquefaction susceptibility is a function of the capacity of sediment to resist liquefaction. Liquefaction opportunity is a function of the potential seismic ground shaking intensity.

The method applied in this study for evaluating liquefaction potential is similar to that of Tinsley and others (1985). Tinsley and others (1985) applied a combination of the techniques used by Seed and others (1983) and Youd and Perkins (1978) for their mapping of liquefaction hazards in the Los Angeles region. CGS's method combines geotechnical analyses, geologic and hydrologic mapping, and probabilistic earthquake shaking estimates, but follows criteria adopted by the SMGB (DOC, 2004).

### **LIQUEFACTION SUSCEPTIBILITY**

Liquefaction susceptibility reflects the relative resistance of a soil to loss of strength when subjected to ground shaking. Physical properties of soil such as sediment grain-size distribution, compaction, cementation, saturation, and depth govern the degree of resistance to liquefaction. Some of these properties can be correlated to a sediment's geologic age and environment of deposition. With increasing age, relative density may increase through cementation of the particles or compaction caused by the weight of the overlying sediment. Grain-size characteristics of a soil also influence susceptibility to liquefaction. Sand is more susceptible than silt or gravel, although silt of low plasticity is treated as liquefiable in this investigation. Cohesive soils generally are not considered susceptible to liquefaction. Such soils may be vulnerable to strength loss with remolding and represent a hazard that is not addressed in this investigation. Soil characteristics and processes that result in higher measured penetration resistances generally indicate lower liquefaction susceptibility. Thus, blow count and cone penetrometer values are useful indicators of liquefaction susceptibility.

Saturation is required for liquefaction, and the liquefaction susceptibility of a soil varies with the depth to ground water. Very shallow ground water increases the susceptibility to liquefaction (soil is more likely to liquefy). Soils that lack resistance (susceptible soils) typically are saturated, loose and sandy. Soils resistant to liquefaction include all soil types that are dry, cohesive, or sufficiently dense.

CGS's map inventory of areas containing soils susceptible to liquefaction begins with evaluation of geologic maps and historical occurrences, cross-sections, geotechnical test data, geomorphology, and ground-water hydrology. Soil properties and soil conditions such as type, age, texture, color, and consistency, along with historical depths to ground water are used to identify, characterize, and correlate susceptible soils. Because Quaternary geologic mapping is based on similar soil observations, liquefaction susceptibility maps typically are similar to Quaternary geologic maps

## LIQUEFACTION OPPORTUNITY

Liquefaction opportunity is a measure, expressed in probabilistic terms, of the potential for strong ground shaking. Analyses of in-situ liquefaction resistance require assessment of liquefaction opportunity. The minimum level of seismic excitation to be used for such purposes is the level of peak ground acceleration (PGA) with a 10 percent probability of exceedance over a 50-year period (DOC, 2004). The earthquake magnitude used in CGS's analysis is the magnitude that contributes most to the calculated PGA for an area.

For the Lancaster West Quadrangle, PGAs ranging from 0.41 to 0.71g, resulting from a predominant earthquake of magnitude 7.8, were used for liquefaction analyses. The PGA and magnitude values were based on de-aggregation of the probabilistic hazard at the 10 percent in 50-year hazard level (Petersen and others, 1996; Cramer and Petersen, 1996). See the ground motion portion (Section 3) of this report for further details.

### Quantitative Liquefaction Analysis

CGS performs quantitative analysis of geotechnical data to evaluate liquefaction potential using the Seed-Idriss Simplified Procedure (Seed and Idriss, 1971; Seed and others, 1983; National Research Council, 1985; Seed and others, 1985; Seed and Harder, 1990; Youd and Idriss, 1997; Youd and others, 2001). Using the Seed-Idriss Simplified Procedure one can calculate soil resistance to liquefaction, expressed in terms of cyclic resistance ratio (CRR), based on SPT results, ground-water level, soil density, moisture content, soil type, and sample depth. CRR values are then compared to calculated earthquake-generated shear stresses expressed in terms of cyclic stress ratio (CSR). The Seed-Idriss Simplified Procedure requires normalizing earthquake loading relative to a M7.5 event for the liquefaction analysis. To accomplish this, CGS's analysis uses the Idriss magnitude-scaling factor (MSF) (Youd and Idriss, 1997). It is convenient to think in terms of a factor of safety (FS) relative to liquefaction, where:  $FS = (CRR / CSR) * MSF$ . FS, therefore, is a quantitative measure of liquefaction potential. CGS uses a factor of safety of 1.0 or less, where CSR equals or exceeds CRR, to indicate the presence of potentially liquefiable soil. While an FS of 1.0 is considered the "trigger" for liquefaction, for a site-specific analysis an FS of as much as 1.5 may be appropriate depending on the vulnerability of the site and related structures.

The CGS liquefaction analysis program calculates an FS for each geotechnical sample where blow counts were collected. Typically, multiple samples are collected for each



borehole. The program then independently calculates an FS for each non-clay layer that includes at least one penetration test using the minimum  $(N_1)_{60}$  value for that layer. The minimum FS value of the layers penetrated by the borehole is used to determine the liquefaction potential for each borehole location. The reliability of FS values varies according to the quality of the geotechnical data. FS, as well as other considerations such as slope, presence of free faces, and thickness and depth of potentially liquefiable soil, are evaluated in order to construct liquefaction potential maps, which are then used to make a map showing zones of required investigation.

Nearly two-thirds of the 37 geotechnical borehole logs reviewed in this study (Plate 1.2) include blow-count data from SPTs or from penetration tests that allow reasonable blow count translations to SPT-equivalent values. Non-SPT values, such as those resulting from the use of 2-inch or 2½-inch inside-diameter ring samplers, are generally translated to SPT-equivalent values if reasonable factors can be used in conversion calculations. The reliability of the SPT-equivalent values varies. Therefore, they are weighted and used in a more qualitative manner. Few borehole logs, however, include all of the information (e.g. soil density, moisture content, sieve analysis, etc.) required for an ideal Seed-Idriss Simplified Procedure. For boreholes having acceptable penetration tests, liquefaction analysis is performed using recorded density, moisture, and sieve test values or using averaged test values of similar materials.

## LIQUEFACTION ZONES

### Criteria for Zoning

Areas underlain by materials susceptible to liquefaction during an earthquake were included in liquefaction zones using criteria developed by the Seismic Hazards Mapping Act Advisory Committee and adopted by the SMGB (DOC, 2004). Under those guideline criteria, liquefaction zones are areas meeting one or more of the following:

1. Areas known to have experienced liquefaction during historical earthquakes
2. Areas of uncompacted fill that are saturated, nearly saturated, or may be expected to become saturated
3. Areas where analyses of existing data indicate that the soils are potentially liquefiable.
4. Areas where existing subsurface data are not sufficient for quantitative evaluation of liquefaction hazard. Within such areas, zones may be delineated by geologic criteria as follows:
  - a) Areas containing soil deposits of late Holocene age (current river channels and their historical floodplains, marshes and estuaries) where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.10 g and the anticipated depth to saturated soil is less than 40 feet; or

- b) Areas containing soil deposits of Holocene age (less than 11,000 years), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.20 g and the anticipated depth to saturated soil is less than 30 feet; or
- c) Areas containing soil deposits of latest Pleistocene age (between 11,000 years and 15,000 years), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.30 g and the anticipated depth to saturated soil is less than 20 feet.

Application of these criteria allows compilation of liquefaction zones of required investigation, which are useful for preliminary evaluations, general land-use planning and delineation of special studies zones (Youd, 1991).

### **Areas of Past Liquefaction**

Documentation of historical liquefaction or paleoseismic liquefaction in the Lancaster West Quadrangle was not found during this study.

### **Artificial Fills**

In the Lancaster West Quadrangle, most artificial fill areas large enough to show at the scale of the mapping consist of engineered fill for elevated segments of freeways and overpasses. Since these fills are considered to be properly engineered, zoning for liquefaction in such areas depends on soil conditions in underlying strata. Non-engineered fills are commonly loose and uncompacted and the material varies in size and type.

### **Areas with Sufficient Existing Geotechnical Data**

Combining limited geotechnical information available with detailed geologic mapping and published water well data generally provided an adequate basis for evaluating regional liquefaction potential in the Lancaster West Quadrangle. The log descriptions and liquefaction analysis indicate that young Quaternary sedimentary deposits in the northern half of the quadrangle commonly include beds of loose, sandy and silty material that could liquefy where saturated within 40 feet of the surface as presented on Plate 1.2.

Three separate areas within the Lancaster West Quadrangle are delineated as zones of required investigation for liquefaction hazard. These are described as follows:

1. A 500- to 4000-foot wide swath of topographically low ground that lies along the juncture of two major alluvial fans sloping to the north and east, respectively. Storm-generated surface water collects within this topographically low area and then is drained to the Piute Ponds/Rosamond Lake to the northeast. In addition, interbedded clay and sand layers reported in geotechnical and water-well logs indicate near-surface perched water periodically exists within this drainage area. Both conditions create potential for liquefaction.

2. The channel of Amargosa Creek extending north from the San Gabriel Mountains through the city of Lancaster. The segment of the creek within the developed part of the city now consists of channelized waterway and buried conduit. Water seeping from the natural and artificial channels into the subsurface creates potential for liquefaction.
3. The water reclamation ponds at the county park situated at the east end of Fox Airport. Pond water seepage into the subsurface creates potential for liquefaction.

#### **Areas with Insufficient Existing Geotechnical Data**

SMGB Criterion Item 4 (see above) was used to extrapolate soil conditions into areas in the undeveloped areas of the Lancaster West Quadrangle where geotechnical data were insufficient for evaluating liquefaction potential.

### **ACKNOWLEDGMENTS**

Thanks go to staff at the California Department, of Transportation, Sacramento District Laboratory; Dan Schneidereit, Bruce Hick, and staff at Earth Systems; Gary Gilbreath, Robert Pierotti, and Timothy Ross at California Department of Water Resources; Charles T. Nestle and Robert Thomas at Los Angeles County Department of Public Works; and Steve Phillips, Devin Galloway, and Peter Martin of the U.S. Geological Survey. Additionally, the author acknowledges CGS staff Terilee McGuire, Lee Wallinder and Bob Moskovitz for providing extraordinary GIS support; Barbara Wanish for preparing the final liquefaction hazard zone maps and graphic displays; Al Barrows for text contributions and editorial support; and student assistants Osama Altashi, Ben Wright, Andrea Ignacio, and Ian Penny for data entry and digitizing support.

## REFERENCES

- ASTM International, 2004, ASTM D 1586-99, Standard Test Method for Penetration Test and Split Barrel Sampling of Soils: ASTM Book of Standards v. 04.08.
- ASTER, (2001): <http://asterweb.jpl.nasa.gov/>
- Bloyd, R.M., Jr., 1967, Water resources of the Antelope Valley-East Kern Water Agency area, California: U.S. Geological Survey Open-File Report, 73 p.
- Budiman, J.S. and Mohammadi, Jamshid, 1995, Effect of large inclusions on liquefaction of sands, *in* Evans, M.D. and Frigaszy, R.J., *editors*, Static and Dynamic properties of Gravelly Soils: American Society of Civil Engineers Geotechnical Special Publication no. 56, p. 48-63.
- California Department of Conservation, Division of Mines and Geology, 1979a, Revised Official Map of Special Studies Zones, Ritter Ridge Quadrangle, scale 1:24,000.
- California Department of Conservation, Division of Mines and Geology, 1979b, Revised Official Map of Special Studies Zones, Sleepy Valley Quadrangle, scale 1:24,000.
- California Department of Conservation, Division of Mines and Geology, 1997, Guidelines for evaluating and mitigating seismic hazards in California: California Division of Mines and Geology Special Publication 117, 74 p.
- California Department of Conservation, Division of Mines and Geology, 2004, Recommended criteria for delineating seismic hazard zones in California: California Division of Mines and Geology Special Publication 118, 12 p.
- California Department of Water Resources, 1965, Water wells in the western part of the Antelope Valley Area, Los Angeles County, California: California Department of Water Resources Bulletin 91-11. *Prepared in cooperation with the U.S. Geological Survey.*
- California Department of Water Resources, 2003, Historical Data Map: <http://wdl.water.ca.gov/>
- Carlson, C.S. and Phillips, S.P., 1998, Water-level changes (1975-98) in the Antelope Valley, California: U.S. Geological Survey Open-File Report 98-561, 2 sheets.
- Carlson, C.S., Leighton, D.A., Phillips, S.P. and Metzger, L.F., 1998, Regional water table (1996) and water-table changes in the Antelope Valley ground-water basin, California: U.S. Geological Survey Water-Resources Investigations Report 98-4022, 2 sheets.

- Cramer, C.H. and Petersen, M.D., 1996, Predominant seismic source distance and magnitude maps for Los Angeles, Orange, and Ventura counties, California: Bulletin of Seismological Society of America, v. 86, no. 5, p. 1,645-1,649.
- Duell, L.F.W., Jr., 1987, Geohydrology of the Antelope Valley area, California, and design for a ground-water-quality monitoring network: U.S. Geological Survey Water-Resources Investigations Report 84-4081, 72 p.
- Durbin, T.J., 1978, Calibration of a mathematical model of the Antelope Valley ground-water basin, California: U.S. Geological Survey Water-Supply Paper 2046, 51 p. (*prepared in cooperation with the California Department of Water Resources*).
- Evans, M.D. and Zhou, Shengping, 1995, Liquefaction behaviour of sand-gravel composites: American Society of Civil Engineers, Journal of Geotechnical Engineering, v. 121, no. 3, p. 287-298.
- Galloway, D.L., Phillips, S.P. and Ikehara, M.E., 1995, Land subsidence and its relation to past and future water supplies in Antelope Valley, California, *in* Borchers, J., editor, Land Subsidence--Case Studies and Current Research: Proceedings of the Dr. Joseph F. Poland Symposium on Land Subsidence, Association of Engineering Geologist Special Publication 8, p. 529-539.
- Harder, L.F. and Seed, H.B., 1986, Determination of penetration resistance for coarse-grained soils using the Becker hammer drill: University of California at Berkeley, College of Engineering, Earthquake Engineering Research Center, report no. UCB/EERC-86/06, 126 p.
- Ishihara, Kenji, 1985, Stability of natural deposits during earthquakes, *in* Proceedings of the Eleventh International Conference on Soil Mechanics and Foundation Engineering, San Francisco, v. 1, p. 321-376.
- Johnson, H.R., 1911, Water resources of Antelope Valley, California: U.S. Geological Survey Water-Supply Paper 278, 92 p.
- Leighton and Associates, 1990, Safety Element of the Los Angeles County General Plan, Hazard Reduction in Los Angeles County: volumes 1 and 2, Plate 4, scale 1:125,000.
- Los Angeles County Department of Public Works, 2003, <http://ladpw.org/wrd/report/> Hydrologic reports 1996-2002,
- National Research Council, 1985, Liquefaction of soils during earthquakes: National Research Council Special Publication, Committee on Earthquake Engineering, National Academy Press, Washington, D.C., 240 p.
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, Tianqing, Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of

- Conservation, Division of Mines and Geology, Open-File Report 96-08; also U.S. Geological Survey Open-File Report 96-706, 33 p.
- Ponti, D.J., 1980, Stratigraphy and engineering characteristics of upper Quaternary sediments in the eastern Antelope Valley and vicinity, California: M.S. Thesis, Stanford, Stanford University, 157 p.
- Ponti, D.J., Burke, D.B. and Hedel, C.W., 1981, Map showing Quaternary geology of the central Antelope Valley and vicinity, California: U.S. Geological Survey Open-File Report 81-737, scale 1:62,500.
- Seed, H.B. and Idriss, I.M., 1971, Simplified procedure for evaluating soil liquefaction potential: Journal of the Soil Mechanics and Foundations Division of ASCE, v. 97: SM9, p. 1,249-1,273.
- Seed, H.B. and Idriss, I.M., 1982, Ground motions and soil liquefaction during earthquakes: Monograph Series, Earthquake Engineering Research Institute, Berkeley, California, 134 p.
- Seed, H.B., Idriss, I.M. and Arango, Ignacio, 1983, Evaluation of liquefaction potential using field performance data: Journal of Geotechnical Engineering, v. 109, no. 3, p. 458-482.
- Seed, H.B., Tokimatsu, Kohji, Harder, L.F., and Chung, R.M., 1985, Influence of SPT procedures in soil liquefaction resistance evaluations: Journal of Geotechnical Engineering, ASCE, v. 111, no. 12, p. 1,425-1,445.
- Seed, R.B. and Harder, L.F., 1990, SPT-based analysis of cyclic pore pressure generation and undrained residual strength: Proceedings of the H. Bolton Seed Memorial Symposium, v. 2, p. 351-376.
- Smith, T.C., 1996, Preliminary maps of seismic hazard zones and draft guidelines for evaluating and mitigating seismic hazards: California Geology, v. 49, no. 6, p. 147-150.
- Sneed, M., and Galloway, D.L., 2000, Aquifer-system compaction and land subsidence: measurements, analyses, and simulations--the Holly Site, Edwards Air Force Base, Antelope Valley, California: U.S. Geological Survey Water-Resources Investigations Report 00-4015, 65 p.
- Southern California Earthquake Center, 1999, Recommended procedures for implementation of DMG Special Publication 117 guidelines for analyzing and mitigating liquefaction in California: Southern California Earthquake Center, University of Southern California, 63 p.
- Sy, Alex, Campanella, R.G. and Stewart, R.A., 1995, BPT-SPT correlations for evaluations of liquefaction resistance in gravelly soils, *in* Evans, M.D. and Fragaszy, R.J., *editors*, Static and Dynamic Properties of Gravelly Soils: American Society of Civil Engineers Geotechnical Special Publication no. 56, p. 1-19.

- Thompson, D.G., 1929, The Mohave Desert region, California, a geographic, geologic and hydrologic reconnaissance: U.S. Geological Survey Water-Supply Paper 578, 759 p.
- Templin, W.E., Phillips, S.P., Cherry, D.E., DeBortoli, M.L. and others, 1995, Land use and water use in the Antelope Valley, California: U.S. Geological Survey Water-Investigations Report 94-4208, 98 p.
- Tinsley, J.C., Youd, T.L., Perkins, D.M. and Chen, A.T.F., 1985, Evaluating liquefaction potential, *in* Ziony, J.I., *editor*, Evaluating earthquake hazards in the Los Angeles region — An earth science perspective: U.S. Geological Survey Professional Paper 1360, p. 263-316.
- U.S. Geological Survey, 2003, Ground Water Atlas of the United States – Segment 1 California Nevada, <http://ca.water.usgs.gov/groundwater/gwatlas/basin/single.html>
- Youd, T.L., 1973, Liquefaction, flow and associated ground failure: U.S. Geological Survey Circular 688, 12 p.
- Youd, T.L., 1991, Mapping of earthquake-induced liquefaction for seismic zonation: Earthquake Engineering Research Institute, Proceedings, Fourth International Conference on Seismic Zonation, v. 1, p. 111-138.
- Youd, T.L. and Idriss, I.M., 1997, *editors*, Proceedings of the NCEER workshop on evaluation of liquefaction resistance of soils: National Center for Earthquake Engineering Research Technical Report NCEER-97-0022, 276 p.
- Youd, T.L., Idriss, I.M., Andrus, R.D., Arango, I., Castro, G., Christian, J.T., Dobry, R., Finn, W.D.L., Harder, L.F. Jr., Hynes, M.E., Ishihara, K., Koester, J.P., Liao, S.S.C., Marcusson, W.F., Martin, G.R., Mitchell, J.K., Moriwaki, Y., Power, M.S., Robertson, P.K., Seed, R.B. and Stokoe K.H., 2001, Liquefaction resistance of soils: Summary report from the 1996 NCEER and 1998 NCEER/NSF workshops on evaluation of liquefaction resistance of soils, *Journal of Geotechnical and Geoenvironmental Engineering*, October 2001, pp 817-833.
- Youd, T.L. and Perkins, D.M., 1978, Mapping liquefaction-induced ground failure potential: *Journal of Geotechnical Engineering*, v. 104, p. 433-446.

## **SECTION 2**

# **EARTHQUAKE-INDUCED LANDSLIDE EVALUATION REPORT**

## **Earthquake-Induced Landslide Zones in the Lancaster West 7.5-Minute Quadrangle, Los Angeles County, California**

**By**  
**Don F. Hoirup Jr. and Janis L. Hernandez**

**California Department of Conservation  
California Geological Survey**

### **PURPOSE**

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) [now called California Geological Survey (CGS)] to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use seismic hazard zone maps prepared by CGS in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within the hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997). The text of this report is on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>

Following the release of DMG Special Publication 117 (DOC, 1997), agencies in the Los Angeles metropolitan region sought more definitive guidance in the review of geotechnical investigations addressing landslide hazards. The agencies made their



request through the Geotechnical Engineering Group of the Los Angeles Section of the American Society of Civil Engineers (ASCE). This group convened an implementation committee in 1998 under the auspices of the Southern California Earthquake Center (SCEC). The committee, which consisted of practicing geotechnical engineers and engineering geologists, released an overview of the practice of landslide analysis, evaluation, and mitigation techniques (SCEC, 2002). This text is also on the Internet at: <http://www.scec.org/>

This section of the evaluation report summarizes seismic hazard zone mapping for earthquake-induced landslides in the Lancaster West 7.5-Minute Quadrangle. Section 1 (addressing liquefaction) and Section 3 (addressing earthquake shaking), complete the report, which is one of a series that summarizes the preparation of seismic hazard zone maps within the state (Smith, 1996). Additional information on seismic hazard zone mapping in California can be accessed on the California Geological Survey's Internet page: <http://www.consrv.ca.gov/CGS/index.htm>

## **BACKGROUND**

Landslides triggered by earthquakes historically have been a significant cause of earthquake damage. In California, large earthquakes such as the 1971 San Fernando, 1989 Loma Prieta, and 1994 Northridge earthquakes triggered landslides that were responsible for destroying or damaging numerous structures, blocking major transportation corridors, and damaging life-line infrastructure. Areas that are most susceptible to earthquake-induced landslides are steep slopes in poorly cemented or highly fractured rocks, areas underlain by loose, weak soils, and areas on or adjacent to existing landslide deposits. These geologic and terrain conditions exist in many parts of California, including numerous hillside areas that have already been developed or are likely to be developed in the future. The opportunity for strong earthquake ground shaking is high in many parts of California because of the presence of numerous active faults. The combination of these factors constitutes a significant seismic hazard throughout much of California, including the hillside areas of the Lancaster West Quadrangle.

## **METHODS SUMMARY**

The mapping of earthquake-induced landslide hazard zones presented in this report is based on the best available terrain, geologic, geotechnical, and seismological data. If unavailable or significantly outdated, new forms of these data were compiled or generated specifically for this project. The following were collected or generated for this evaluation:

- Digital terrain data were used to provide an up-to-date representation of slope gradient and slope aspect in the study area

- Geologic mapping was used to provide an accurate representation of the spatial distribution of geologic materials in the study area. In addition, a map of existing landslides, whether triggered by earthquakes or not, was prepared
- Geotechnical laboratory test data were collected and statistically analyzed to quantitatively characterize the strength properties and dynamic slope stability of geologic materials in the study area
- Seismological data in the form of CGS probabilistic shaking maps and catalogs of strong-motion records were used to characterize future earthquake shaking within the mapped area

The data collected for this evaluation were processed into a series of GIS layers using commercially available software. A slope stability analysis was performed using the Newmark method of analysis (Newmark, 1965), resulting in a map of landslide hazard potential. The earthquake-induced landslide hazard zone was derived from the landslide hazard potential map according to criteria developed in a CGS pilot study (McCrink and Real, 1996; McCrink, 2001) and adopted by the State Mining and Geology Board (DOC, 2004).

### **SCOPE AND LIMITATIONS**

The methodology used to make this map is based on earthquake ground-shaking estimates, geologic material-strength characteristics and slope gradient. These data are gathered from a variety of outside sources. Although the selection of data used in this evaluation was rigorous, the quality of the data is variable. The State of California and the Department of Conservation make no representations or warranties regarding the accuracy of the data gathered from outside sources.

Earthquake-induced landslide zone maps are intended to prompt more detailed, site-specific geotechnical investigations as required by the Act. As such, these zone maps identify areas where the potential for earthquake-induced landslides is relatively high. Due to limitations in methodology, it should be noted that these zone maps do not necessarily capture all potential earthquake-induced landslide hazards. Earthquake-induced ground failures that are not addressed by this map include those associated with ridge-top spreading and shattered ridges. It should also be noted that no attempt has been made to map potential run-out areas of triggered landslides. It is possible that such run-out areas may extend beyond the zone boundaries. The potential for ground failure resulting from liquefaction-induced lateral spreading of alluvial materials, considered by some to be a form of landsliding, is not specifically addressed by the earthquake-induced landslide zone or this report. See Section 1, Liquefaction Evaluation Report for the Lancaster West Quadrangle, for more information on the delineation of liquefaction zones.

The remainder of this report describes in more detail the mapping data and processes used to prepare the earthquake-induced landslide zone map for the Lancaster West

Quadrangle. The information is presented in two parts. Part I covers physiographic, geologic and engineering geologic conditions in the study area. Part II covers the preparation of landslide hazard potential and landslide zone maps.

## **PART I**

### **PHYSIOGRAPHY**

#### **Study Area Location and Physiography**

The Lancaster West 7.5-Minute Quadrangle covers approximately 62 square miles in the Antelope Valley in northern Los Angeles County. The center of the area is about 44 miles north of the Los Angeles Civic Center. The terrain in the northern half of the quadrangle is nearly level, at 2,340 to 2,350 feet elevation, where fine-grained sediments were deposited at the margin of a regional pluvial lake or playa in late Pleistocene time. In the southwestern corner, the land rises to an elevation of 3,300 feet on Portal Ridge. Southwest of Lancaster, Quartz Hill is about 200 feet above the surrounding area along Avenue M at 40<sup>th</sup> Street West. Amargosa Creek, which flows northward in the eastern part of the quadrangle, becomes indistinct near the center of the quadrangle where the lake deposits occur. Most of the land in the map area is within the City of Lancaster, including the community of Quartz Hill. Land east of the Antelope Valley Freeway, south of Avenue M, is within the City of Palmdale, as is a small area south of Avenue N in the southwestern corner. General William J. Fox Airfield is in the northwestern corner of the quadrangle. The remainder of the quadrangle is unincorporated Los Angeles County land. Land use consists of residential and commercial developments, airport facilities, agriculture, and government and prison facilities. Access to the area is via State Highway 14 (Antelope Valley Freeway) and Sierra Highway and a grid of county roads consisting of numbered north-south streets and lettered east-west avenues.

#### **Digital Terrain Data**

The calculation of slope gradient is an essential part of the evaluation of slope stability under earthquake conditions. An accurate slope gradient calculation begins with an up-to-date map representation of the earth's surface in the form of a digital topographic map. Within the Lancaster West Quadrangle, a Level 2 digital elevation model (DEM) was obtained from the USGS (U.S. Geological Survey, 1993). This DEM, prepared from the 7.5-minute quadrangle topographic contours based on 1956 aerial photography, has a 10-meter horizontal resolution and a 7.5-meter vertical accuracy.

A slope map was made from the DEM using a third-order, finite difference, center-weighted algorithm (Horn, 1981). The DEM was also used to make a slope aspect map. The manner in which the slope and aspect maps were used to prepare the zone map will be described in subsequent sections of this report.

## GEOLOGY

### Bedrock and Surficial Geology

The bedrock geologic map used in this slope stability evaluation was digitized by the Southern California Areal Mapping Project [SCAMP] from the 1:62,500-scale map by Ponti and others (1981), who mapped the Quaternary geology of the central Antelope Valley and vicinity, including the Lancaster West Quadrangle. Pre-Quaternary crystalline rocks are generalized on their map. Bedrock geology was modified by CGS staff in some areas, to reflect more recent and/or detailed mapping. In addition, geologic mapping by Evans (1966) and Dibblee (1960; 1967) and reports prepared by Barrows and others (1985; 1987) and Ross (1976) were consulted. Air-photo interpretation, digital orthophoto file review, and field reconnaissance was performed to assist in adjusting contacts between bedrock and surficial geologic units, and to review geologic unit lithology and geologic structure. In the field, observations were made of exposures, aspects of weathering, and general surface expression of the geologic units. No landslides were found in the map area.

Bedrock in the Lancaster West Quadrangle is exposed on Portal Ridge in the extreme southwestern corner of the map and on prominent Quartz Hill, located within the lower third of the map area.

The two types of bedrock mapped by Ponti and others (1981) include schist (map symbol sch) and generalized granitic and metamorphic rocks (map symbol gr-m). The schist bedrock, locally named Portal Schist (Evans, 1966), consists mostly of pre-Cenozoic, medium gray, fine- to coarse-grained biotite quartzo-feldspathic rocks. White vein quartz is locally common within the Portal Schist, and diabase dikes have been mapped at Quartz Hill (Dibblee, 1960; Ross, 1976). This bedrock weathers as tan to light brown grus, and the biotite-rich rocks are readily weathered along the foliation where exposed.

At the southwestern corner of the map are exposures of generalized granitic and metamorphic rocks (Ponti and others, 1981, map symbol gr-m). This bedrock is mapped as Jurassic to Cretaceous (?) quartz monzonite (Dibblee 1960). The rocks are grayish white, medium grained with minor biotite, highly jointed and weathers into light tan grus.

The remainder of the quadrangle is covered by Quaternary alluvial units, including Pleistocene lakebed deposits, dissected alluvial fans, and terrace deposits (Ponti and others, 1981; Woodruff and others, 1970). Additional mapped deposits include Holocene alluvial fans, colluvial aprons around bedrock hills, and recent channel deposits from Amargosa Creek and smaller unnamed creeks, draining the area northward from the Portal Ridge vicinity. Surficial geology is discussed in detail in Section 1 of this report.

### Structural Geology

Most of the Lancaster West Quadrangle area is underlain at depth by a granitic batholith, which extends across most of the western Mojave Desert area (Dibblee, 1967). However, in the southwestern portion of the quadrangle, linear ridges, including Portal Ridge, are

aligned with the northwest-trending faults that belong to the San Andreas Fault Zone (Evans, 1966; Barrows and others, 1985). The closest active fault strand is located approximately 1.2 miles south of the southern quadrangle boundary within the Leona Valley portion of the Ritter Ridge Quadrangle. The San Andreas Fault is the southwestern boundary of the Mojave block geomorphic province of California and is considered to be a major potential seismic source (Petersen and others, 1996).

### **Landslide Inventory**

As a part of the geologic data compilation, inspection of existing geologic maps in the Lancaster West Quadrangle, field reconnaissance, and analysis of stereo-paired aerial photographs and digital orthophoto quarter quadrangle files was performed. No landslides were found in the Lancaster West Quadrangle. However, the aprons of coarse-grained talus near the mapped bedrock quarry areas indicate that rock falls may be the expected form of seismically triggered slope failure within the quarry areas and immediate vicinity.

## **ENGINEERING GEOLOGY**

### **Geologic Material Strength**

To evaluate the stability of geologic materials under earthquake conditions, the geologic map units described above were ranked and grouped on the basis of their shear strength. Generally, the primary source for shear-strength measurements is geotechnical reports prepared by consultants on file with local government permitting departments. Shear-strength data for the units identified on the Lancaster West Quadrangle geologic map were obtained from Los Angeles County Department of Public Works (see Appendix A). The locations of rock and soil samples taken for shear testing within the Lancaster West Quadrangle are shown on Plate 2.1. Shear tests from the adjoining Ritter Ridge Quadrangle were used to augment data for several geologic units for which little or no shear test information was available within the Lancaster West Quadrangle.

Shear strength data gathered from the above sources were compiled for each geologic map unit. Geologic units were grouped on the basis of average angle of internal friction (average  $\phi$ ) and lithologic character. Average (mean or median)  $\phi$  values for each geologic map unit and corresponding strength group, are summarized in Table 2.1. For most of the geologic strength groups (Table 2.2) in the map area, a single shear strength value was assigned and used in our slope stability analysis. A geologic material strength map was made based on the groupings presented in Table 2.1 and Table 2.2, and this map provides a spatial representation of material strength for use in the slope stability analysis. Due to their similar ages and lithologies, all Quaternary deposits were combined during our statistical evaluation of shear strength.

LANCASTER WEST SHEAR STRENGTH GROUPS							
	Formation Name	Number Tests	Mean/Median Phi (deg)	Mean/Median Group Phi (deg)	Mean/Median Group C (psf)	No Data: Similar Lithology	Phi Values Used in Stability Analyses
GROUP 1	gr-m	87					38**
GROUP 2	sch	2	31/31	32	165		32
	Qal*	4	32/32				
<u>Geologic deposits combined in analysis</u>							
Qal* = Q3c, Q4c, Q6c, Q7c, Q6m, Q7m, Qds, Qpl, Qsc, Quca							
** = indicates that the shear strength data is taken from adjacent Ritter Ridge Quadrangle.							
Formations name abbreviations from Ponti and others, 1981							

**Table 2.1. Summary of the Shear Strength Statistics for the Lancaster West Quadrangle.**

SHEAR STRENGTH GROUPS FOR THE LANCASTER WEST 7.5-MINUTE QUADRANGLE	
GROUP 1	GROUP 2
gr-m	sch, Qal

**Table 2.2. Summary of Shear Strength Groups for the Lancaster West Quadrangle.**

## PART II

### EARTHQUAKE-INDUCED LANDSLIDE HAZARD POTENTIAL

#### Design Strong-Motion Record

To evaluate earthquake-induced landslide hazard potential in the study area, a method of dynamic slope stability analysis developed by Newmark (1965) was used. The Newmark method analyzes dynamic slope stability by calculating the cumulative down-slope displacement for a given earthquake strong-motion time history. As implemented for the preparation of earthquake-induced landslide zones, the Newmark method necessitates the selection of a design earthquake strong-motion record to provide the “ground shaking opportunity.” For the Lancaster West Quadrangle, selection of a strong motion record

was based on an estimation of probabilistic ground motion parameters for modal magnitude, modal distance, and peak ground acceleration (PGA). The parameters were estimated from maps prepared by CGS for a 10 percent probability of being exceeded in 50 years (Petersen and others, 1996). The parameters used in the record selection are:


Modal Magnitude:	7.8
Modal Distance:	4.8 to 21.4 km
PGA:	0.37 to 0.80 g

The strong-motion record selected for the slope stability analysis in the Lancaster West Quadrangle was the Southern California Edison Lucerne Record from the 1992 Landers earthquake. This record had a source to recording site distance of 1.1 km and a peak ground acceleration (PGA) of 0.80g. Although the Lucerne record parameters are not a perfect match for the probabilistic parameters, this record was considered to be sufficiently conservative to be used in the stability analyses. The selected strong-motion record was not scaled or otherwise modified prior to its use in the analysis.

### **Displacement Calculation**

The design strong-motion record was used to develop a relationship between landslide displacement and yield acceleration ( $a_y$ ), defined as the earthquake horizontal ground acceleration above which landslide displacements take place. This relationship was prepared by integrating the design strong-motion record twice for a given acceleration value to find the corresponding displacement, and the process was repeated for a range of acceleration values (Jibson, 1993). The resulting curve in Figure 2.1 represents the full spectrum of displacements that can be expected for the design strong-motion record. This curve provides the required link between anticipated earthquake shaking and estimates of displacement for different combinations of geologic materials and slope gradient, as described in the Slope Stability Analysis section below.

The amount of displacement predicted by the Newmark analysis provides an indication of the relative amount of damage that could be caused by earthquake-induced landsliding. Displacements of 30, 15 and 5 cm were used as criteria for rating levels of earthquake-induced landslide hazard potential based on the work of Youd (1980), Wilson and Keefer (1983), and a CGS pilot study for earthquake-induced landslides (McCrink and Real, 1996; McCrink, 2001). Applied to the curve in Figure 2.1, these displacements correspond to yield accelerations of 0.14, 0.18, and 0.24g. Because these yield acceleration values are derived from the design strong-motion record, they represent the ground shaking opportunity thresholds that are significant in the Lancaster West Quadrangle.



**Figure 2.1. Yield Acceleration vs. Newmark Displacement for the Lucerne Record.**

### Slope Stability Analysis

A slope stability analysis was performed for each geologic material strength group at slope increments of 1 degree. An infinite-slope failure model under unsaturated slope conditions was assumed. A factor of safety was calculated first, followed by the calculation of yield acceleration from Newmark's equation:

$$a_y = (FS - 1)g \sin \alpha$$

where **FS** is the Factor of Safety, **g** is the acceleration due to gravity, and  **$\alpha$**  is the direction of movement of the slide mass, in degrees measured from the horizontal, when displacement is initiated (Newmark, 1965). For an infinite slope failure  **$\alpha$**  is the same as the slope angle.

The yield accelerations resulting from Newmark's equations represent the susceptibility to earthquake-induced failure of each geologic material strength group for a range of slope gradients. Based on the relationship between yield acceleration and Newmark displacement shown in Figure 2.1, hazard potentials were assigned as follows:

1. If the calculated yield acceleration was less than 0.14g, Newmark displacement greater than 30 cm is indicated, and a HIGH hazard potential was assigned.



2. If the calculated yield acceleration fell between 0.18 and 0.14g, Newmark displacement between 15 cm and 30 cm is indicated, and a MODERATE hazard potential was assigned.
3. If the calculated yield acceleration fell between 0.24g and 0.18g, Newmark displacement between 5 cm and 15 cm is indicated, and a LOW hazard potential was assigned.
4. If the calculated yield acceleration was greater than 0.24g, Newmark displacement of less than 5 cm is indicated, and a VERY LOW potential was assigned.

Table 2.3 summarizes the results of the stability analyses. The earthquake-induced landslide hazard potential map was prepared by combining the geologic material-strength map and the slope map according to this table.

<b>LANCASTER WEST QUADRANGLE HAZARD POTENTIAL MATRIX</b>				
<b>Geologic Material Strength Group (Average Phi)</b>	<b>HAZARD POTENTIAL ( Percent Slope)</b>			
	<b>Very Low</b>	<b>Low</b>	<b>Moderate</b>	<b>High</b>
<b>1 (38 )</b>	0 to 49%	50 to 57%	58 to 61%	>62%
<b>2 (32 )</b>	0 to 37%	38 to 44%	45 to 48%	>49%

**Table 2.3. Hazard Potential Matrix for Earthquake-Induced Landslides in the Lancaster West Quadrangle.** Values in the table show the range of slope gradient (expressed as percent slope) corresponding to calculated Newmark displacement ranges from the design earthquake for each material strength group.

## **EARTHQUAKE-INDUCED LANDSLIDE HAZARD ZONE**

### **Criteria for Zoning**

Earthquake-induced landslide zones were delineated using criteria adopted by the California State Mining and Geology Board (DOC, 2004). Under these criteria, earthquake-induced landslide hazard zones are defined as areas that meet one or both of the following conditions:

1. Areas that have been identified as having experienced landslide movement in the past, including all mappable landslide deposits and source areas as well as any landslide that is known to have been triggered by historic earthquake activity.
2. Areas where the geologic and geotechnical data and analyses indicate that the earth materials may be susceptible to earthquake-induced slope failure.

These conditions are discussed in further detail in the following sections.

### **Existing Landslides**

No landslides were recognized in the Lancaster West Quadrangle.

### **Geologic and Geotechnical Analysis**

Based on the conclusions of a pilot study performed by CGS (McCrink and Real, 1996; McCrink, 2001), it has been concluded that earthquake-induced landslide hazard zones should encompass all areas that have a High, Moderate or Low level of hazard potential (see Table 2.3). This would include all areas where the analyses indicate earthquake displacements of 5 cm or greater. Areas with a Very Low hazard potential, indicating less than 5 cm displacement, are excluded from the zone.

As summarized in Table 2.3, all areas characterized by the following geologic strength group and slope gradient conditions are included in the earthquake-induced landslide hazard zone:

1. Geologic Strength Group 2 is included for all slope gradients greater than 37 percent.
2. Geologic Strength Group 1 is included for all slopes steeper than 49 percent.

This results in less than one percent (<1 %) of the Lancaster West Quadrangle area lying within the earthquake-induced landslide hazard zone.

## **ACKNOWLEDGMENTS**

The authors would like to thank the following individuals and organizations for their assistance in obtaining the data necessary to complete this project: Charles Nestle and Greg Johnson from Los Angeles County Department of Public Works. At CGS, Terilee McGuire and Bob Moscovitz provided GIS support. Barbara Wanish prepared the final landslide hazard zone maps and the graphic displays for this report.

## **REFERENCES**

Barrows, A.G., Kahle, J.E. and Beeby, D.J., 1985, Earthquake hazards and tectonic history of the San Andreas Fault Zone, Los Angeles County, California: California

Department of Conservation, Division of Mines and Geology Open-File Report 85-10; 139 p., scale 1:12,000.

- Barrows, A.G., Kahle, J.E. and Beeby, D.J., 1987, Earthquake hazards and tectonic history of the San Andreas Fault Zone, Los Angeles County, California *in* Hester, R.L. and Hollinger, D.E., *editors*, San Andreas Fault – Cajon Pass to Palmdale: Pacific Section American Association of Petroleum Geologists, Volume and Guidebook No. 59, p. 1-92.
- California Department of Conservation, Division of Mines and Geology, 1997, Guidelines for evaluating and mitigating seismic hazards in California: California Division of Mines and Geology Special Publication 117, 74 p.
- California Department of Conservation, Division of Mines and Geology, 2004, Recommended criteria for delineating seismic hazard zones: California Division of Mines and Geology Special Publication 118, 12 p.
- Dibblee, T.W. Jr., 1960, Geologic map of the Lancaster Quadrangle, Los Angeles County, California: U.S. Geological Survey Mineral Investigations Field Studies Map MF-76, map scale 1:62,500.
- Dibblee, T.W. Jr., 1967, Areal geology of the western Mojave Desert, California: U.S. Geological Survey Professional Paper 522, 153 p., map scale 1:125,000.
- Evans, J.G., 1966, Structural analysis and movements of the San Andreas Fault Zone near Palmdale, Southern California: Ph.D. Thesis, University of California, Los Angeles, 186 p., Plates 1 and 2, map scale 1:10,000.
- Horn, B.K.P., 1981, Hill shading and the reflectance map: Proceedings of the IEEE, v. 69, no. 1, p. 14-47.
- Jibson, R.W., 1993, Predicting earthquake-induced landslide displacements using Newmark's sliding block analysis: Transportation Research Board, National Research Council, Transportation Research Record 1411, 17 p.
- Keefer, D.K., 1984, Landslides caused by earthquakes: Geological Society of America Bulletin, v. 95, no. 4, p. 406-421.
- McCrink, T.P., 2001, Mapping earthquake-induced landslide hazards in Santa Cruz County *in* Ferriz, H. and Anderson, R., *editors*, Engineering geology practice in northern California: California Geological Survey Bulletin 210 / Association of Engineering Geologists Special Publication 12, p.77-94.
- McCrink, T.P. and Real, C.R., 1996, Evaluation of the Newmark method for mapping earthquake-induced landslide hazards in the Laurel 7-1/2 Minute Quadrangle, Santa Cruz County, California: California Division of Mines and Geology Final Technical Report for U.S. Geological Survey Contract 143-93-G-2334, U.S. Geological Survey, Reston, Virginia, 31 p.

- Newmark, N.M., 1965, Effects of earthquakes on dams and embankments: *Geotechnique*, v. 15, no. 2, p. 139-160.
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, T., Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology, Open-File Report 96-08; also U.S. Geological Survey Open-File Report 96-706, 33 p.
- Ponti, D.J., 1980, Stratigraphy and engineering characteristics of upper Quaternary sediments in the eastern Antelope Valley and vicinity, California: MS thesis, Stanford University, California, 157 p., Plates 1 - 4, map scale 1:62,500.
- Ponti, D.J., Burke, D.B. and Hedel, C.W., 1981, Map showing Quaternary geology of the central Antelope Valley and vicinity, California: U.S. Geological Survey Open-File Report 81-737, map scale 1:62,500.
- Ross, D.C., 1976, Metagraywacke in the Salinian block, central Coast Ranges, California – and a possible correlative across the San Andreas Fault: U.S. Geological Survey, *Journal of Research*, v. 4, no. 6, p. 683–696.
- Smith, T.C., 1996, Preliminary maps of seismic hazard zones and draft guidelines for evaluating and mitigating seismic hazards: *California Geology*, v. 49, no. 6, p. 147-150.
- Southern California Earthquake Center, 2002, Recommended procedures for implementation of DMG Special Publication 117 guidelines for analyzing and mitigating landslide hazards in California: T.F. Blake, R.A. Hollingsworth and J.P. Stewart, *editors*, Southern California Earthquake Center, University of Southern California, 108 p.
- U.S. Geological Survey, 1993, Digital Elevation Models: National Mapping Program, Technical Instructions, Data Users Guide 5, 48 p.
- Wilson, R.C. and Keefer, D.K., 1983, Dynamic analysis of a slope failure from the 1979 Coyote Lake, California, earthquake: *Bulletin of the Seismological Society of America*, v. 73, p. 863-877.
- Woodruff, G.A., McCoy, W.J. and Sheldon, W.B., 1970, Soil survey of the Antelope Valley area, California: U.S. Department of Agriculture, 187 p, 10 plates, scale 1:126,720, 102 maps, scale 1:2000.
- Youd, T.L., 1980, Ground failure displacement and earthquake damage to buildings: American Society of Civil Engineers Conference on Civil Engineering and Nuclear Power, 2d, Knoxville, Tennessee, 1980, v. 2, p. 7-6-2 to 7-6-26.

## AIR PHOTOS

Department of County Engineers, Soil Survey Los Angeles County, photo numbers; 1-63 through 1-67, 1-94 through 1-96 dated 3-26-68, and 3-30 through 3-34, and 3-52 through 3-55, dated 3-28-68, scale 1:24,000.

Digital Orthophoto Quarter Quadrangle Photos, dated 5-31-94, southwest quarter quadrangle area, Lancaster West Quadrangle. (DOQQ and information concerning them can be obtained at <http://geography.wr.usgs.gov/doq/> )

## APPENDIX A SOURCE OF ROCK STRENGTH DATA

SOURCE	NUMBER OF TESTS SELECTED
Los Angeles County Department of Public Works	6
Ritter Ridge Quadrangle	87
Total Number of Shear Tests	93

## **SECTION 3**

# **GROUND SHAKING EVALUATION REPORT**

### **Potential Ground Shaking in the Lancaster West 7.5-Minute Quadrangle, Los Angeles County, California**

**By**

**Mark D. Petersen\*, Chris H. Cramer\*, Geoffrey A. Faneros,  
Charles R. Real, and Michael S. Reichle**

**California Department of Conservation  
California Geological Survey**

**\*Formerly with CGS, now with U.S. Geological Survey**

## **PURPOSE**

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) [now called California Geological Survey (CGS)] to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use the Seismic Hazard Zone Maps in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within the hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997). The text of this report is on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>

This section of the evaluation report summarizes the ground motions used to evaluate liquefaction and earthquake-induced landslide potential for zoning purposes. Included are ground motion and related maps, a brief overview on how these maps were prepared, precautionary notes concerning their use, and related references. The maps provided

herein are presented at a scale of approximately 1:150,000 (scale bar provided on maps), and show the full 7.5-minute quadrangle and portions of the adjacent eight quadrangles. They can be used to assist in the specification of earthquake loading conditions *for the analysis of ground failure* according to the "Simple Prescribed Parameter Value" method (SPPV) described in the site investigation guidelines (DOC, 1997). Alternatively, they can be used as a basis for comparing levels of ground motion determined by other methods with the statewide standard.

This section and Sections 1 and 2 (addressing liquefaction and earthquake-induced landslide hazards) constitute a report series that summarizes development of seismic hazard zone maps in the state. Additional information on seismic hazard zone mapping in California can be accessed on the California Geological Survey's Internet page: <http://www.consrv.ca.gov/CGS/index.htm>

## EARTHQUAKE HAZARD MODEL

The estimated ground shaking is derived from the statewide probabilistic seismic hazard evaluation released cooperatively by the California Department of Conservation, Division of Mines and Geology [California Geological Survey], and the U.S. Geological Survey (Petersen and others, 1996). That report documents an extensive 3-year effort to obtain consensus within the scientific community regarding fault parameters that characterize the seismic hazard in California. Fault sources included in the model were evaluated for long-term slip rate, maximum earthquake magnitude, and rupture geometry. These fault parameters, along with historical seismicity, were used to estimate return times of moderate to large earthquakes that contribute to the hazard.


The ground shaking levels are estimated for each of the sources included in the seismic source model using attenuation relations that relate earthquake shaking with magnitude, distance from the earthquake, and type of fault rupture (strike-slip, reverse, normal, or subduction). The published hazard evaluation of Petersen and others (1996) only considers uniform firm-rock site conditions. In this report, however, we extend the hazard analysis to include the hazard of exceeding peak horizontal ground acceleration (PGA) at 10 percent probability of exceedance in 50 years on spatially uniform conditions of rock, soft rock, and alluvium. These soil and rock conditions approximately correspond to site categories defined in Chapter 16 of the Uniform Building Code (ICBO, 1997), which are commonly found in California. We use the attenuation relations of Boore and others (1997), Campbell (1997), Sadigh and others (1997), and Youngs and others (1997) to calculate the ground motions.

The seismic hazard maps for ground shaking are produced by calculating the hazard at sites separated by about 5 km. Figures 3.1 through 3.3 show the hazard for PGA at 10 percent probability of exceedance in 50 years assuming the entire map area is firm rock, soft rock, or alluvial site conditions respectively. The sites where the hazard is calculated are represented as dots and ground motion contours as shaded regions. The quadrangle of interest is outlined by bold lines and centered on the map. Portions of the eight

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)

1998

FIRM ROCK CONDITIONS

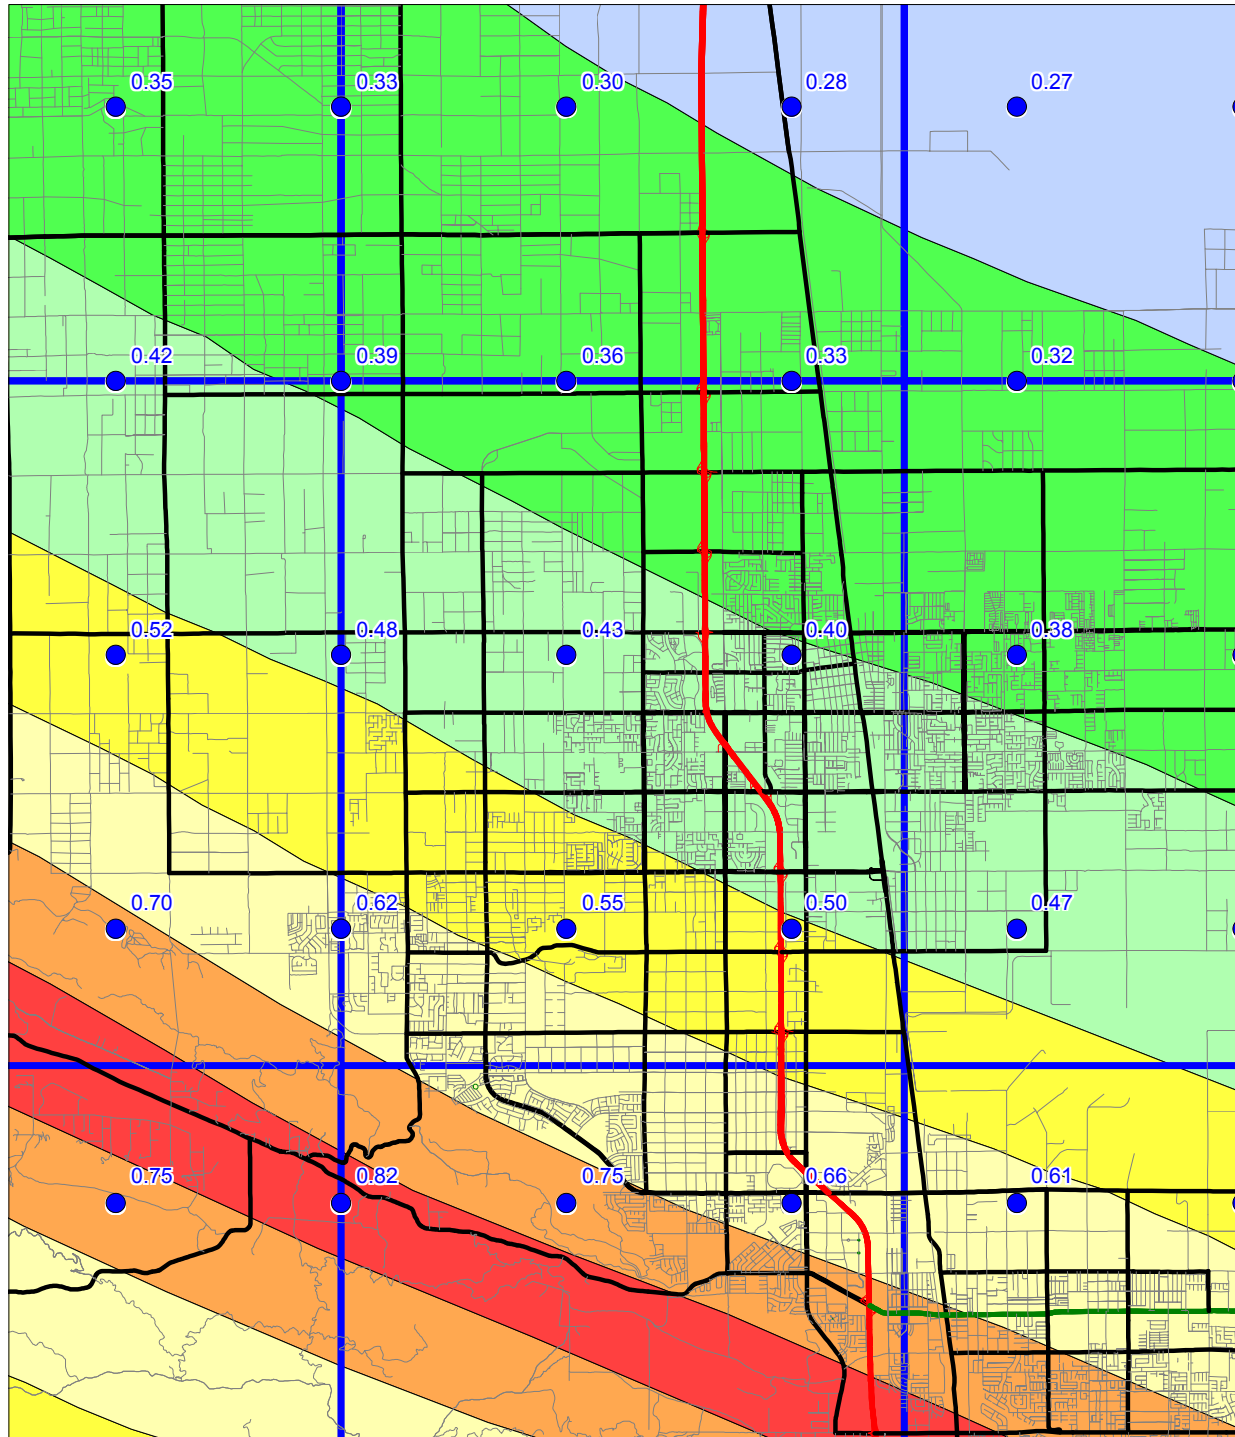

Base map from GDT

0 1.5 3  
Miles

Department of Conservation  
California Geological Survey

Figure 3.1






LANCASTER WEST 7.5 MINUTE QUADRANGLE AND PORTIONS OF  
ADJACENT QUADRANGLES

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)

1998

SOFT ROCK CONDITIONS

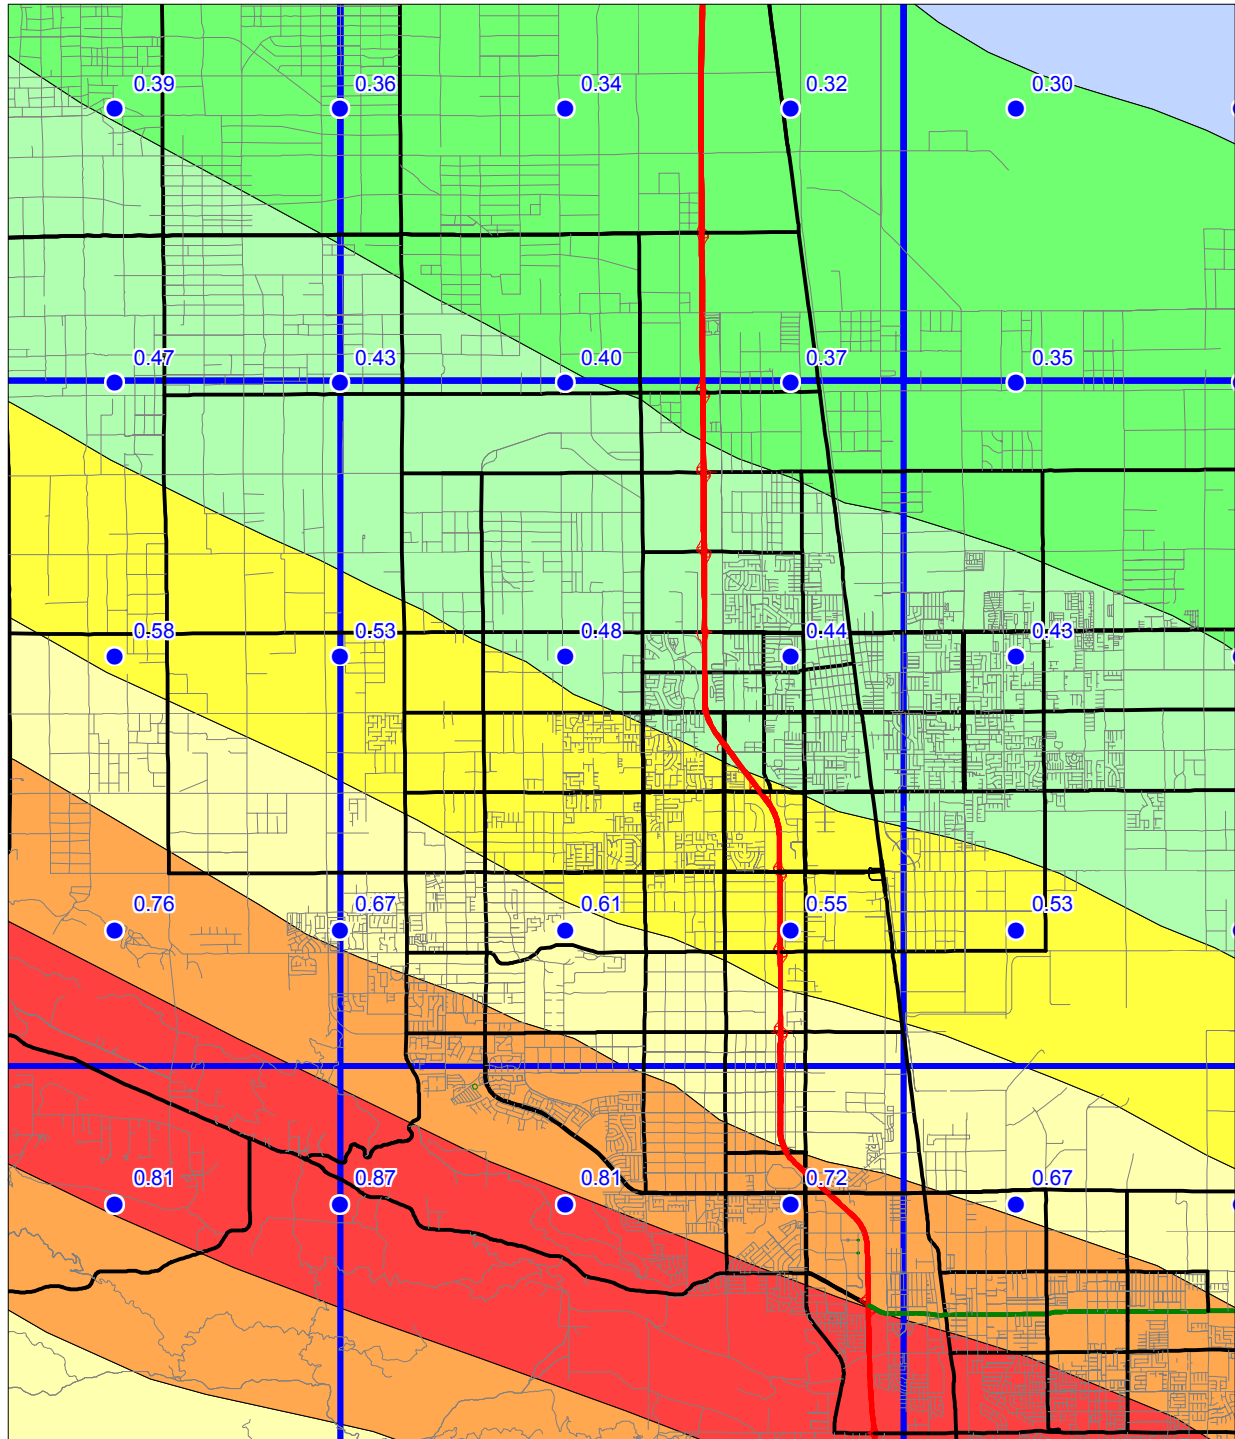

Base map from GDT

0 1.5 3  
Miles


Department of Conservation  
California Geological Survey

Figure 3.2



LANCASTER WEST 7.5 MINUTE QUADRANGLE AND PORTIONS OF  
ADJACENT QUADRANGLES10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)  
1998

## ALLUVIUM CONDITIONS

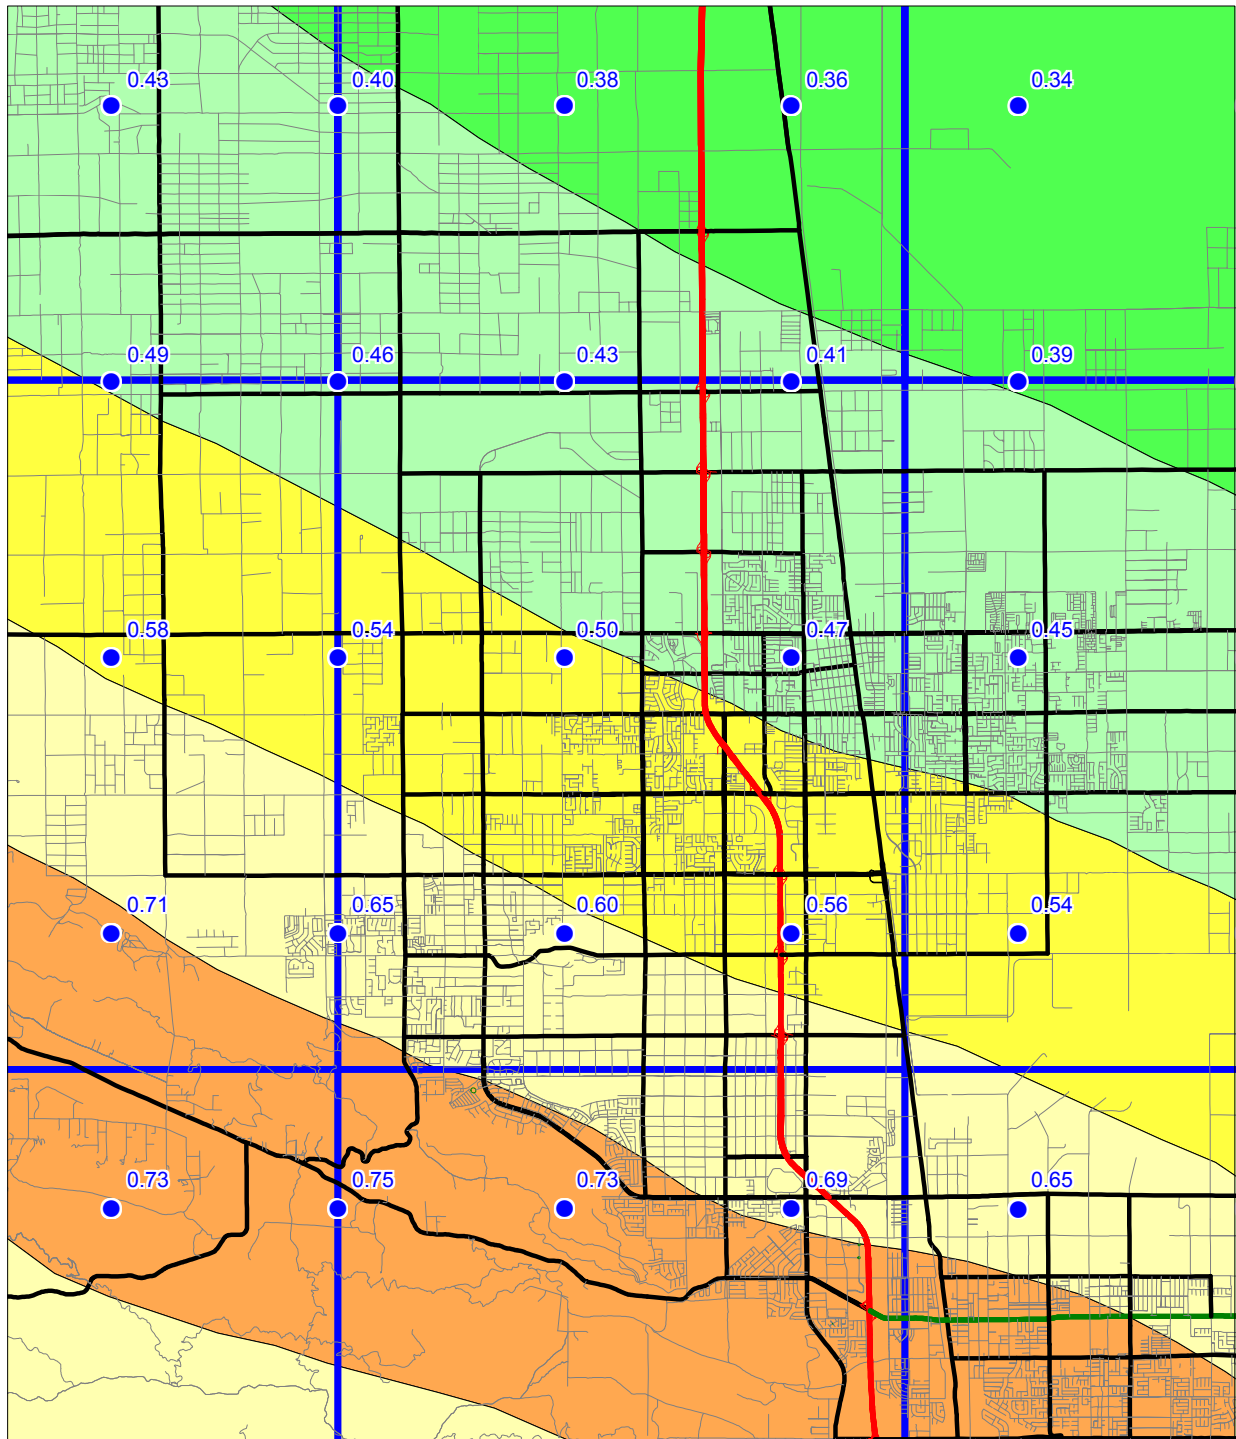

Base map from GDT


Department of Conservation  
California Geological Survey

Figure 3.3



adjacent quadrangles are also shown so that the trends in the ground motion may be more apparent. We recommend estimating ground motion values by selecting the map that matches the actual site conditions, and interpolating from the calculated values of PGA rather than the contours, since the points are more accurate.

### APPLICATIONS FOR LIQUEFACTION AND LANDSLIDE HAZARD ASSESSMENTS

Deaggregation of the seismic hazard identifies the contribution of each of the earthquakes (various magnitudes and distances) in the model to the ground motion hazard for a particular exposure period (see Cramer and Petersen, 1996). The map in Figure 3.4 identifies the magnitude and the distance (value in parentheses) of the earthquake that contributes most to the hazard at 10 percent probability of exceedance in 50 years on alluvial site conditions (*predominant earthquake*). This information gives a rationale for selecting a seismic record or ground motion level in evaluating ground failure. However, it is important to keep in mind that more than one earthquake may contribute significantly to the hazard at a site, and those events can have markedly different magnitudes and distances. For liquefaction hazard the predominant earthquake magnitude from Figure 3.4 and PGA from Figure 3.3 (alluvium conditions) can be used with the Youd and Idriss (1997) approach to estimate cyclic stress ratio demand. For landslide hazard the predominant earthquake magnitude and distance can be used to select a seismic record that is consistent with the hazard for calculating the Newmark displacement (Wilson and Keefer, 1983). When selecting the predominant earthquake magnitude and distance, it is advisable to consider the range of values in the vicinity of the site and perform the ground failure analysis accordingly. This would yield a range in ground failure hazard from which recommendations appropriate to the specific project can be made. Grid values for predominant earthquake magnitude and distance should **not** be interpolated at the site location, because these parameters are not continuous functions.

A preferred method of using the probabilistic seismic hazard model and the “simplified Seed-Idriss method” of assessing liquefaction hazard is to apply magnitude scaling probabilistically while calculating peak ground acceleration for alluvium. The result is a “magnitude-weighted” ground motion (liquefaction opportunity) map that can be used directly in the calculation of the cyclic stress ratio threshold for liquefaction and for estimating the factor of safety against liquefaction (Youd and Idriss, 1997). This can provide a better estimate of liquefaction hazard than use of predominate magnitude described above, because all magnitudes contributing to the estimate are used to weight the probabilistic calculation of peak ground acceleration (Real and others, 2000). Thus, large distant earthquakes that occur less frequently but contribute *more* to the liquefaction hazard are appropriately accounted for.

Figure 3.5 shows the magnitude-weighted alluvial PGA based on Idriss’ weighting function (Youd and Idriss, 1997). It is important to note that the values obtained from this map are pseudo-accelerations and should be used in the formula for factor of safety without any magnitude-scaling (a factor of 1) applied.


**SEISMIC HAZARD EVALUATION OF THE LANCASTER WEST QUADRANGLE**  
**LANCASTER WEST 7.5 MINUTE QUADRANGLE AND PORTIONS OF**  
**ADJACENT QUADRANGLES**

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION

1998

**PREDOMINANT EARTHQUAKE**

Magnitude (Mw)  
 (Distance (km))



Base map from GDT

0 1.5 3  
 Miles

Department of Conservation  
 California Geological Survey

Figure 3.4




**SEISMIC HAZARD EVALUATION OF THE LANCASTER WEST QUADRANGLE  
LANCASTER WEST 7.5 MINUTE QUADRANGLE AND PORTIONS OF  
ADJACENT QUADRANGLES**

SHZR095

**10% EXCEEDANCE IN 50 YEARS MAGNITUDE-WEIGHTED PSEUDO-PEAK ACCELERATION (g)  
FOR ALLUVIUM**

1998

**LIQUEFACTION OPPORTUNITY**

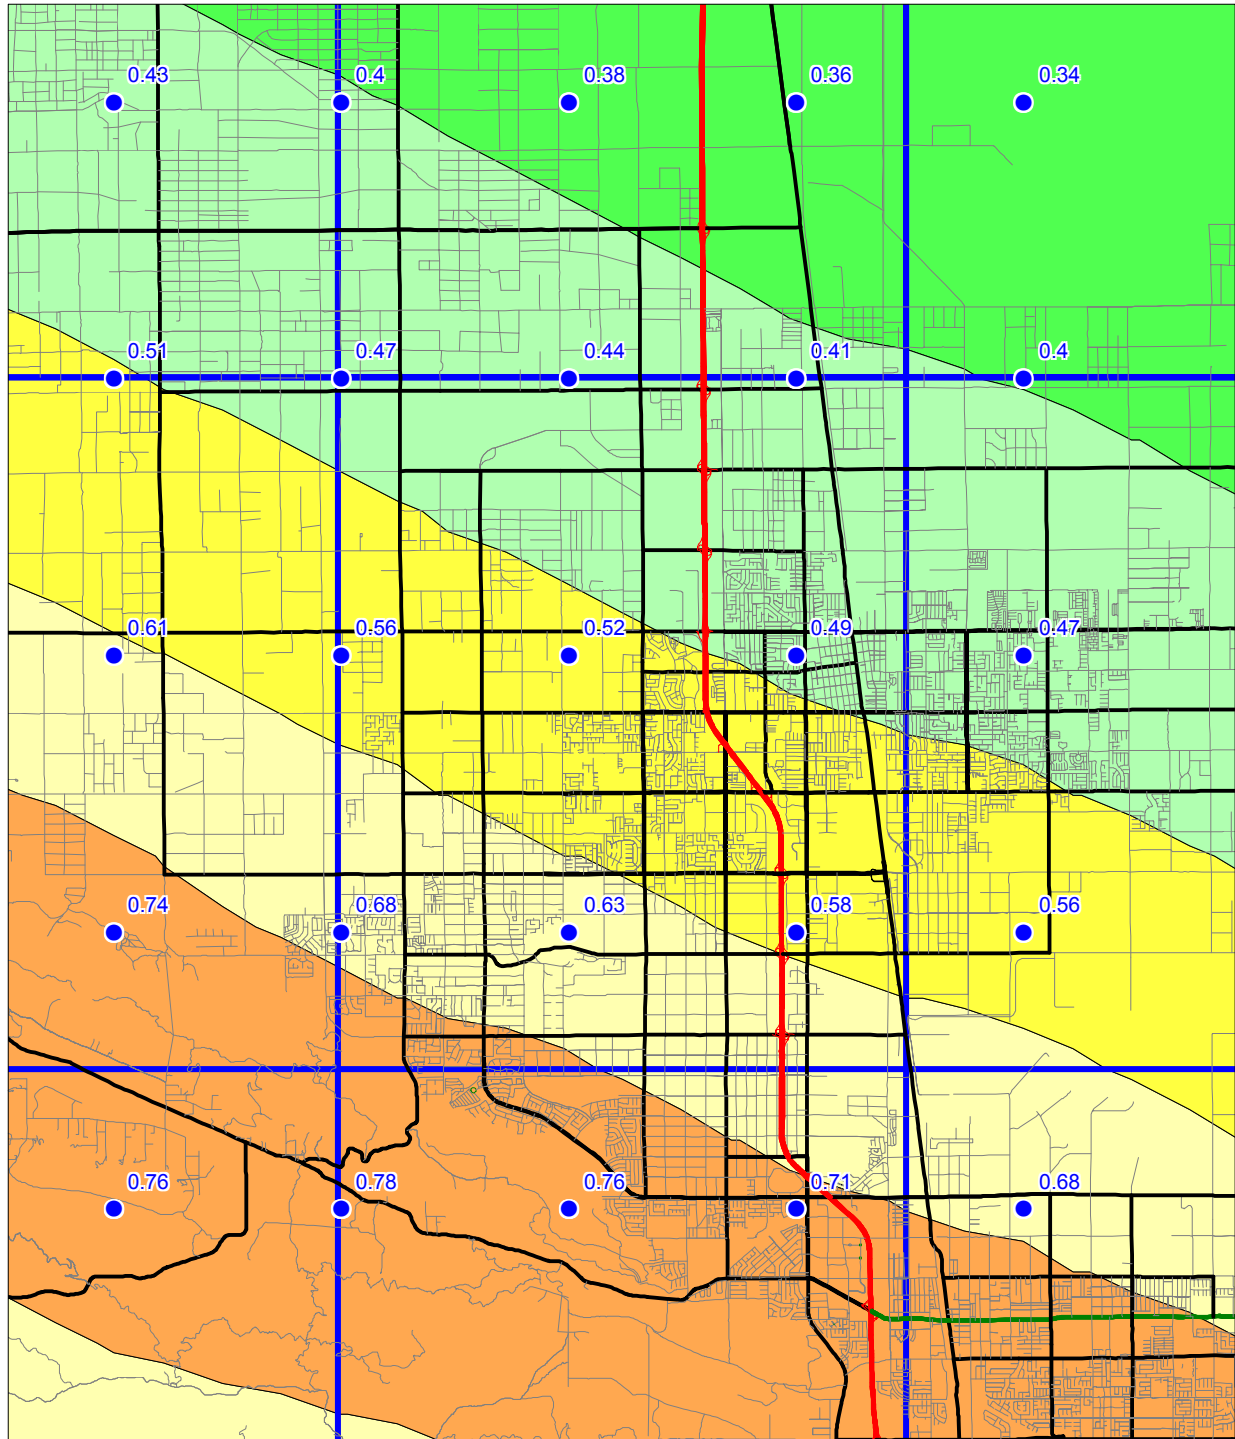

Base map from GDT

0 1.5 3  
Miles

Department of Conservation  
California Geological Survey



Figure 3.5

## USE AND LIMITATIONS

The statewide map of seismic hazard has been developed using regional information and is ***not appropriate for site specific structural design applications***. Use of the ground motion maps prepared at larger scale is limited to estimating earthquake loading conditions for preliminary assessment of ground failure at a specific location. We recommend consideration of site-specific analyses before deciding on the sole use of these maps for several reasons.

1. The seismogenic sources used to generate the peak ground accelerations were digitized from the 1:750,000-scale fault activity map of Jennings (1994). Uncertainties in fault location are estimated to be about 1 to 2 kilometers (Petersen and others, 1996). Therefore, differences in the location of calculated hazard values may also differ by a similar amount. At a specific location, however, the log-linear attenuation of ground motion with distance renders hazard estimates less sensitive to uncertainties in source location.
2. The hazard was calculated on a grid at sites separated by about 5 km (0.05 degrees). Therefore, the calculated hazard may be located a couple kilometers away from the site. We have provided shaded contours on the maps to indicate regional trends of the hazard model. However, the contours only show regional trends that may not be apparent from points on a single map. Differences of up to 2 km have been observed between contours and individual ground acceleration values. *We recommend that the user interpolate PGA between the grid point values rather than simply using the shaded contours.*
3. Uncertainties in the hazard values have been estimated to be about +/- 50 percent of the ground motion value at two standard deviations (Cramer and others, 1996).
4. Not all active faults in California are included in this model. For example, faults that do not have documented slip rates are not included in the source model. Scientific research may identify active faults that have not been previously recognized. Therefore, future versions of the hazard model may include other faults and omit faults that are currently considered.
5. A map of the predominant earthquake magnitude and distance is provided from the deaggregation of the probabilistic seismic hazard model. However, it is important to recognize that a site may have more than one earthquake that contributes significantly to the hazard. Therefore, in some cases earthquakes other than the predominant earthquake should also be considered.

Because of its simplicity, it is likely that the SPPV method (DOC, 1997) will be widely used to estimate earthquake shaking loading conditions for the evaluation of ground failure hazards. It should be kept in mind that ground motions at a given distance from an earthquake will vary depending on site-specific characteristics such as geology, soil properties, and topography, which may not have been adequately accounted for in the regional hazard analysis. Although this variance is represented to some degree by the

recorded ground motions that form the basis of the hazard model used to produce Figures 3.1, 3.2, and 3.3, extreme deviations can occur. More sophisticated methods that take into account other factors that may be present at the site (site amplification, basin effects, near source effects, etc.) should be employed as warranted. The decision to use the SPPV method with ground motions derived from Figures 3.1, 3.2, or 3.3 should be based on careful consideration of the above limitations, the geotechnical and seismological aspects of the project setting, and the “importance” or sensitivity of the proposed building with regard to occupant safety.

## REFERENCES

- Boore, D.M., Joyner, W.B. and Fumal, T.E., 1997, Empirical near-source attenuation relationships for horizontal and vertical components of peak ground acceleration, peak ground velocity, and pseudo-absolute acceleration response spectra: *Seismological Research Letters*, v. 68, p. 154-179.
- California Department of Conservation, Division of Mines and Geology, 1997, *Guidelines for evaluating and mitigating seismic hazards in California: Special Publication 117*, 74 p.
- Campbell, K.W., 1997, Attenuation relationships for shallow crustal earthquakes based on California strong motion data: *Seismological Research Letters*, v. 68, p. 180-189.
- Cramer, C.H. and Petersen, M.D., 1996, Predominant seismic source distance and magnitude maps for Los Angeles, Orange and Ventura counties, California: *Bulletin of the Seismological Society of America*, v. 85, no. 5, p. 1645-1649.
- Cramer, C.H., Petersen, M.D. and Reichle, M.S., 1996, A Monte Carlo approach in estimating uncertainty for a seismic hazard assessment of Los Angeles, Ventura, and Orange counties, California: *Bulletin of the Seismological Society of America*, v. 86, p. 1681-1691.
- International Conference of Building Officials (ICBO), 1997, *Uniform Building Code: v. 2, Structural engineering and installation standards*, 492 p.
- Jennings, C.W., *compiler*, 1994, *Fault activity map of California and adjacent areas: California Department of Conservation, Division of Mines and Geology, California Geologic Data Map Series, map no. 8.*
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, T., Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology Open-File Report 96-08; also U.S. Geological Survey Open-File Report 96-706, 33 p.

- Real, C.R., Petersen, M.D., McCrink, T.P. and Cramer, C.H., 2000, Seismic Hazard Deaggregation in zoning earthquake-induced ground failures in southern California: Proceedings of the Sixth International Conference on Seismic Zonation, November 12-15, Palm Springs, California, EERI, Oakland, CA.
- Sadigh, K., Chang, C.-Y., Egan, J.A., Makdisi, F. and Youngs, R.R., 1997, SEA96- A new predictive relation for earthquake ground motions in extensional tectonic regimes: Seismological Research Letters, v. 68, p. 190-198.
- Wilson, R.C. and Keefer, D.K., 1983, Dynamic analysis of a slope failure from the 1979 Coyote Lake, California, Earthquake: Bulletin of the Seismological Society of America, v. 73, p. 863-877.
- Youd, T.L. and Idriss I.M., 1997, Proceedings of the NCEER workshop on evaluation of liquefaction resistance of soils: Technical Report NCEER-97-0022, 40 p.
- Youngs, R.R., Chiou, S.-J., Silva, W.J. and Humphrey, J.R., 1997, Stochastic point-source modeling of ground motions in the Cascadia Region: Seismological Research Letters, v. 68, p. 74-85.




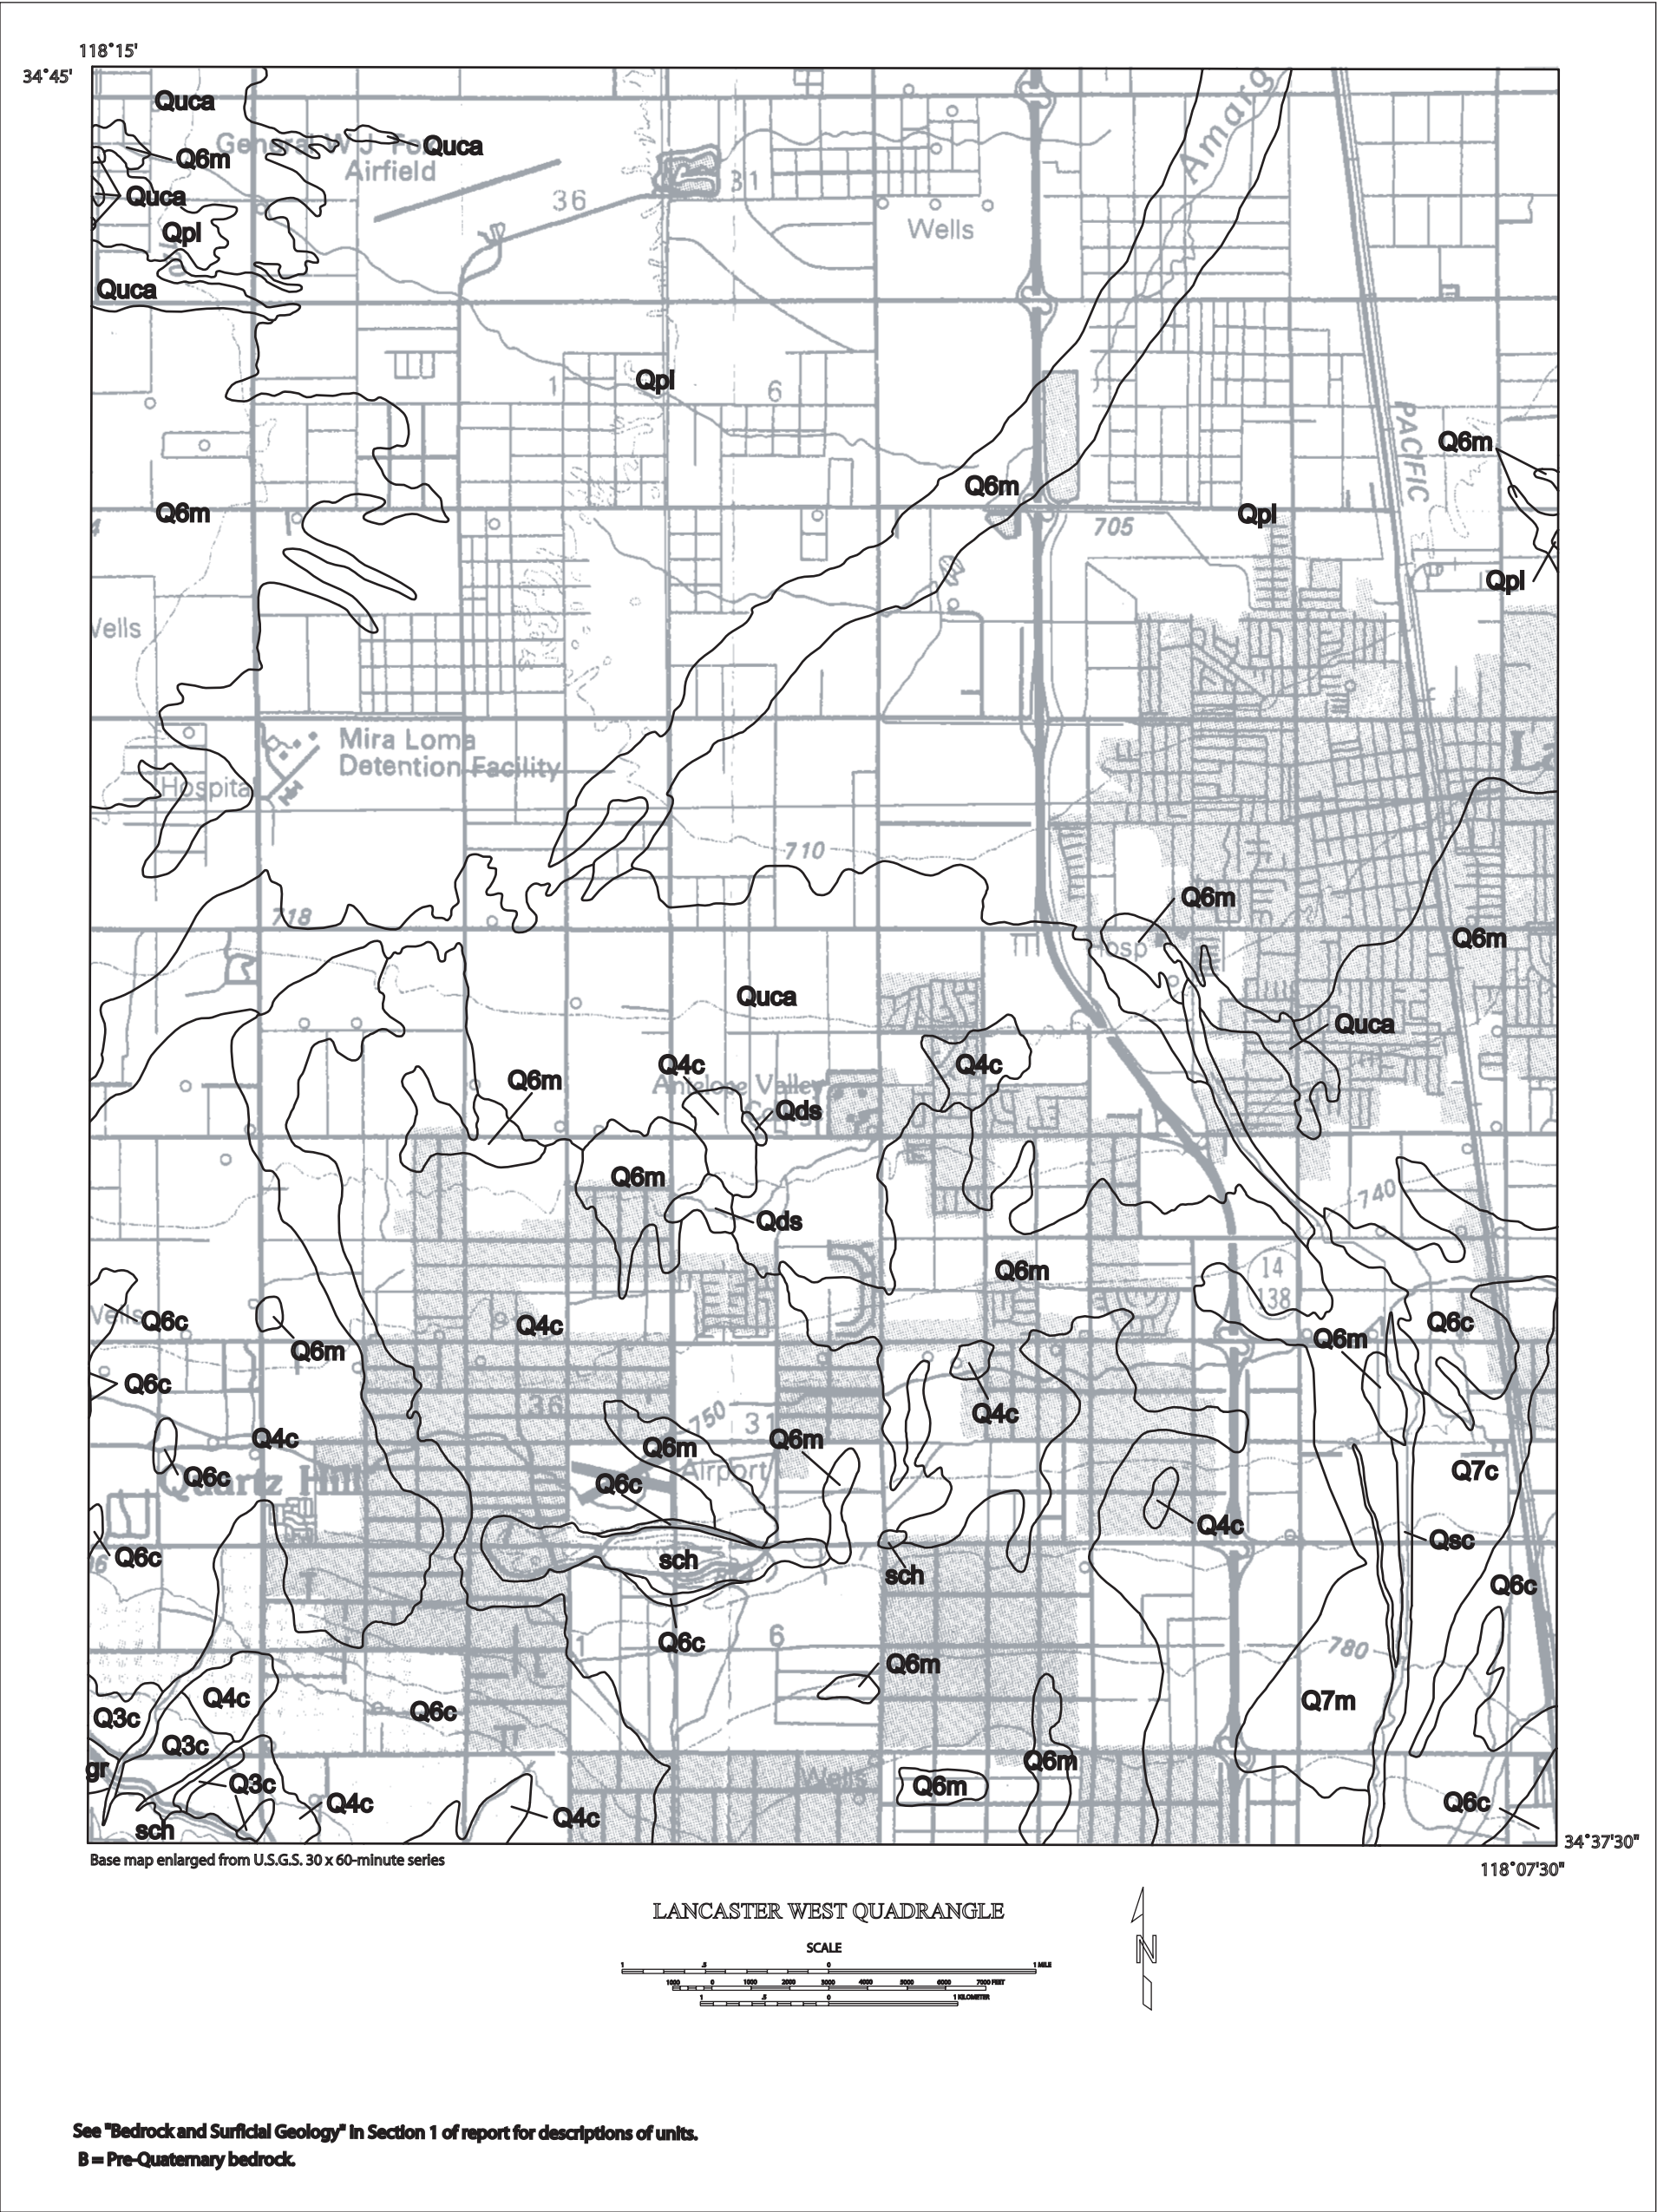



Plate 1.1 Quaternary Geologic Map of the Lancaster West 7.5-minute quadrangle.

From Ponti and others (1981)

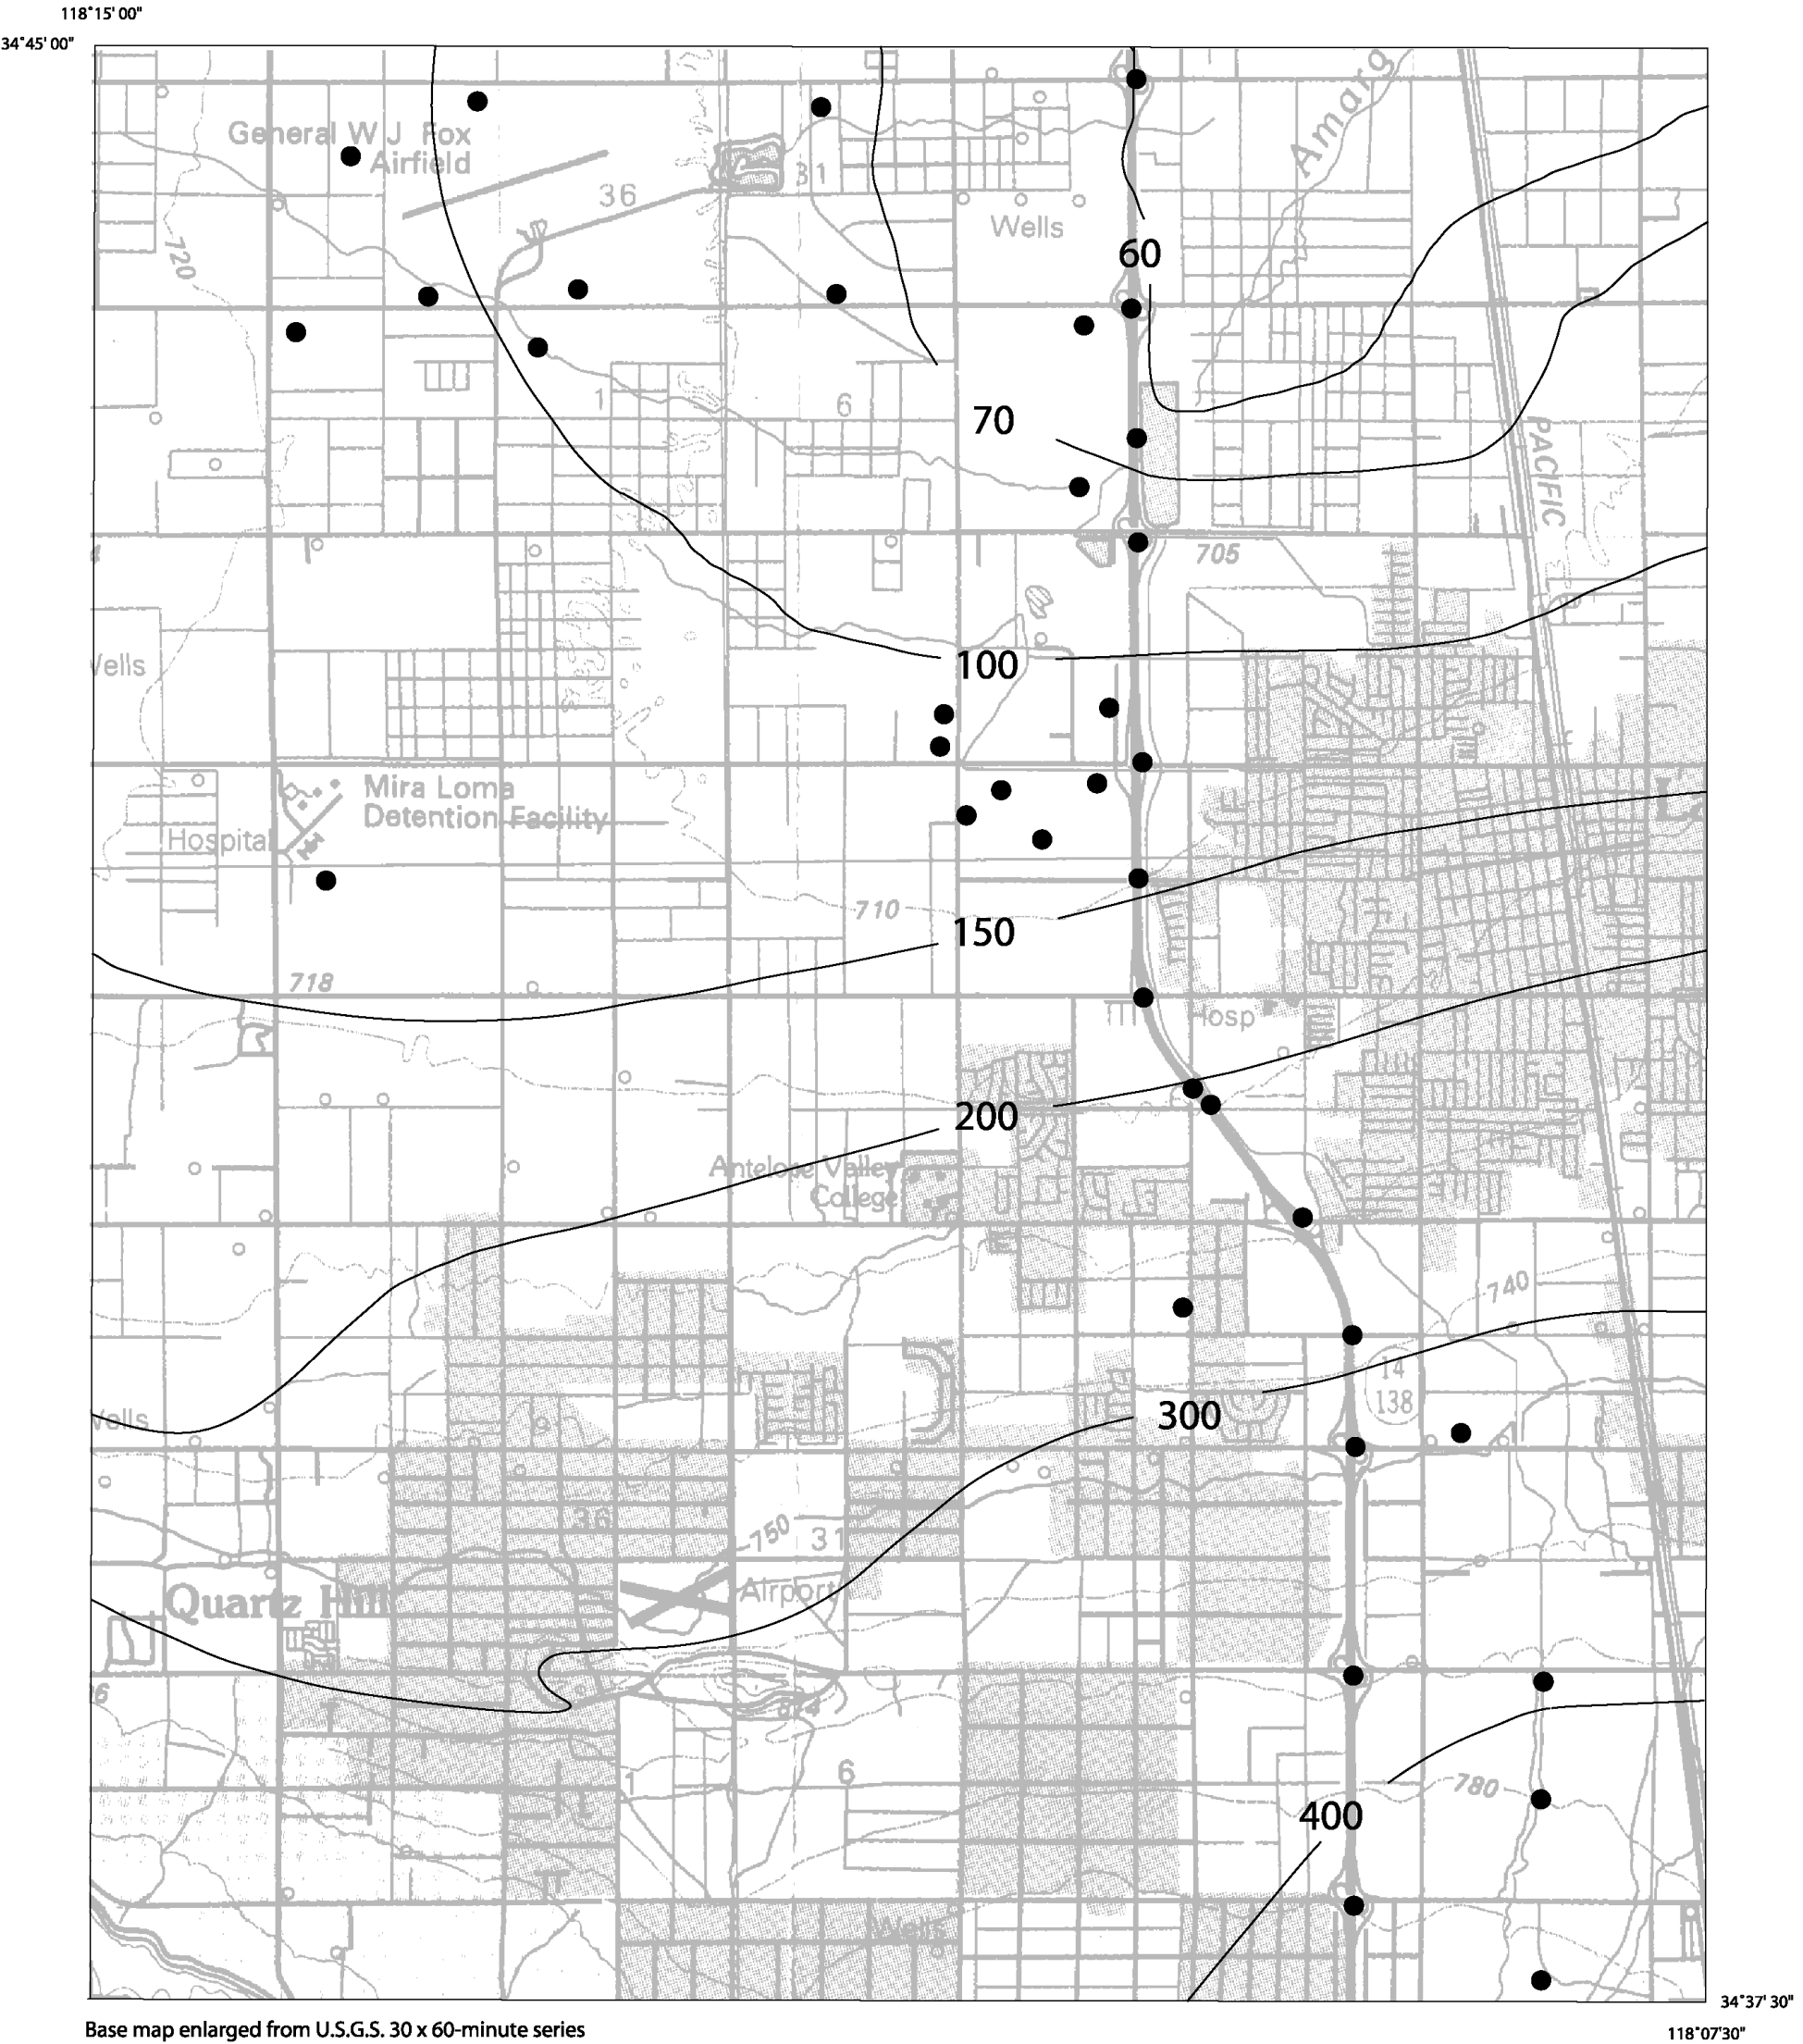

Base map enlarged from U.S.G.S. 30 x 60-minute series

LANCASTER WEST QUADRANGLE



100 — Depth to ground water, in feet

● Geotechnical borings used in liquefaction evaluation

Plate 1.2 Depth to ground water, and locations of boreholes used in this study, Lancaster West 7.5-Minute Quadrangle, California. Regional ground-water levels based on Carlson and Phillips (1998).